

Bulkhead Mounted Jack-Jack Adapters (Connect two plugs)

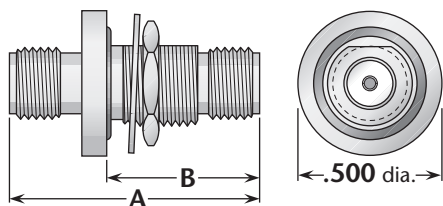


Figure 1
(Hermetically sealed, with mounting gasket)

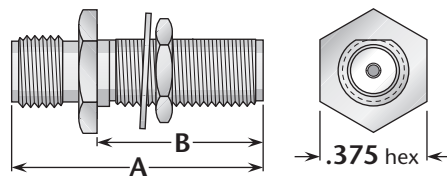


Figure 2
(Non-hermetic, no mounting gasket)

Figure	Dimensions		Max. Panel	Mounting Figure	Plating		Delta P/N
	A	B			Body	Contact	
1	.875	.555	.190	66	Gold	Gold (C)	1326-000-G678
2	.875	.575	.250	67	Gold	Gold (C)	1326-000-G821
2	.875	.575	.250	67	Passivated	Gold (C)	1326-000-K821-1

Straight Adapters

Figure 1
(Straight jack-jack;
connects two plugs)




Figure 2
(Straight plug-plug;
connects two jacks)




Figure 3
(Straight jack-plug;
connects one plug
and one jack)




Figure	Dimensions		Plating		Delta P/N
	A	B	Body	Contact	
1	.500	.218	Gold	Gold (C)	1328-000-G000
1	.500	.218	Passivated	Gold (C)	1328-000-K000-1
2	.875	.218	Gold	Gold (C)	1327-000-G000
2	.875	.218	Passivated	Gold (C)	1327-000-K000-2
3	.72	—	Gold	Gold (C)	1334-000-G000
3	.72	—	Passivated	Gold (C)	1334-000-K000

(C) in contact plating column indicates captive contact. • See page 203 for mounting dimensions.