




## Straight, Right Angle, and Tee Adapters




**Figure 1**  
(Straight jack-jack; connects two plugs)




**Figure 2**  
(Straight plug-plug; connects two jacks)

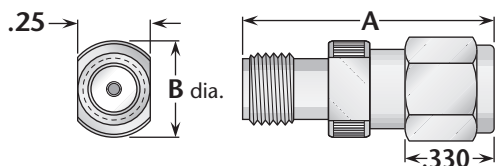


**Figure 3**  
(Straight jack-plug; connects one plug and one jack)



**Figure 4**  
(Right angle plug-jack; connects one plug and one jack)



**Figure 5**  
(Tee jack-plug-jack; connects two plugs and one jack)



**Figure 6**  
(Tee jack-jack-jack; connects three plugs)

Figure	Dimensions		Plating		Delta P/N
	A	B	Body	Contact	
1	.500	.250	Gold*	Gold (C)	1328-000-G001-500
2	.900	—	Gold*	Gold (C)	1327-000-G001-500
3	.86	.335	Gold*	Gold (C)	1334-000-G001-500
4	.654	.594	Gold*	Gold (C)	1329-000-G001-500
5	.913	.654	Gold*	Gold (C)	1330-000-G001-500
6	.913	.594	Gold*	Gold (C)	1338-000-G001-500

\* Also available with nickel-plated body—change G in Delta part number to N.  
(C) in contact plating column indicates captive contact (mechanical captivation).