

Straight Plug—For Semi-Rigid Cable

Figure 1
(Direct solder)




Figure 2
(Direct solder)







Figure 3
(Solder-clamp)



Delta One-Step Cable Attachment for Semi-Rigid Cable

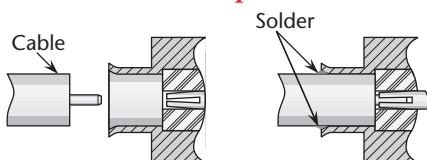

Delta “One-Step” connectors feature captivated contacts and insulators to allow rapid, easy assembly to semi-rigid cable—simply trim the cable jacket and dielectric flush, chamfer the center conductor, insert into the connector, and solder the jacket to the connector body.



Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
13	1	.330	—	Gold	None ⁽²⁾	1301-031-G003	G/01
13	1	.330	—	Gold/PCN ⁽¹⁾	None ⁽²⁾	1301-031-K003	G/01
13	2	.330	.445	Gold	None ⁽²⁾	1301-031-G003-2	G/01
13	2	.330	.445	Gold/PCN ⁽¹⁾	None ⁽²⁾	1301-031-K003-2	G/01
13	2	.330	.445	Gold	Gold	1301-031-G003-3	H/01
13	2	.330	.445	Gold/PCN ⁽¹⁾	Gold	1301-031-K003-12	H/01
13	3	.68	.312	Gold	Gold (C)	1301-031-G007	***
13	4	.330	.430	Gold/PCN ⁽¹⁾	Gold (C)	1301-031-K003-8	I/01
14	2	.330	.445	Gold	Gold	1301-094-G003	H/01
14	2	.330	.445	Gold/PCN ⁽¹⁾	Gold	1301-094-K003	H/01
14	3	.68	.312	Gold	Gold (C)	1301-025-G007	***
14	4	.330	.430	Gold/PCN ⁽¹⁾	Gold (C)	1301-094-K003-1	I/01

⁽¹⁾ Gold-plated body and passivated coupling nut. ⁽²⁾ Cable center conductor used as contact.

Right Angle Plug—For Semi-Rigid Cable

Figure 1
(Direct solder)





Figure 2
(One-Step cable attachment)



Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
13	1	.68	.43	Gold	Gold (C)	1305-031-G003	J/01
13	1	.68	.43	Gold/PCN ⁽¹⁾	Gold (C)	1305-031-K003	J/01
13	2	.57	.58	Gold	Gold (C)	1305-031-G003-2	I/01
13	2	.57	.58	Gold/PCN ⁽¹⁾	Gold (C)	1305-031-K003-4	I/01
14	1	.68	.43	Gold	Gold (C)	1305-025-G003	J/01
14	1	.68	.43	Gold/PCN ⁽¹⁾	Gold (C)	1305-025-K003	J/01
14	2	.57	.58	Gold	Gold (C)	1305-094-G003-3	I/01
14	2	.57	.58	Gold/PCN ⁽¹⁾	Gold (C)	1305-094-K003-5	I/01

⁽¹⁾ Gold-plated body and passivated coupling nut.

See page 204 for cable groups. • Assembly procedures start on page 205. • ***Contact factory for cable assembly instructions.
(C) in contact plating column indicates captive contact.