
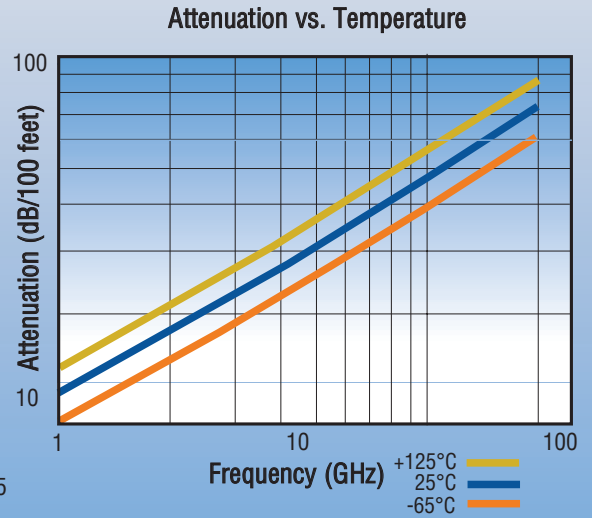


# Silverline Test Cables

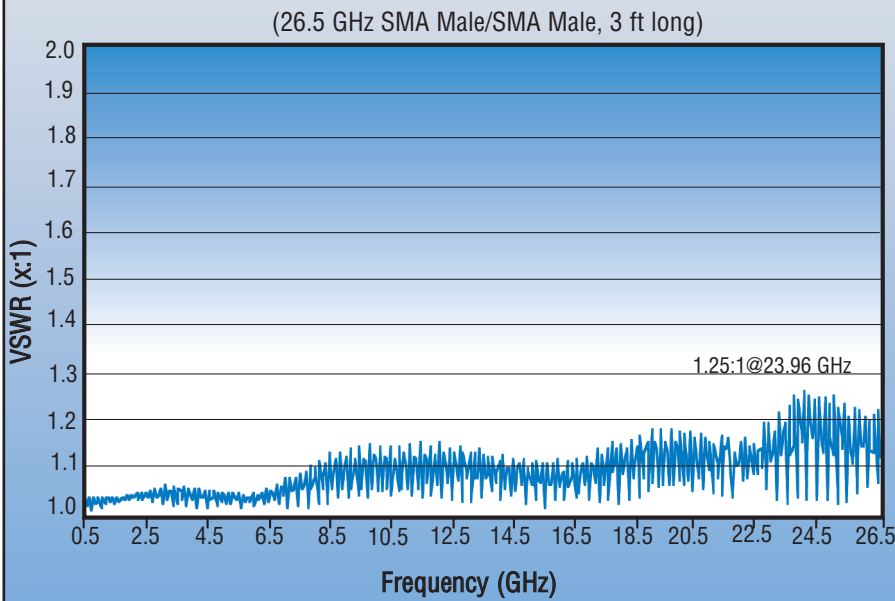

## Ordering Information

U = Unarmored  
A = Armored

Feet: 0.50 ft Increments  
Example: -04.50F = 4.50 ft  
Meters: 0.25 m increments  
Example: -00.75M = 0.75 m

SLXXX-XXXXXX-XX.XXX

### Maximum Frequency

04 = 4.0 GHz (BNC equipped only)  
06 = 6.0 GHz  
18 = 18.0 GHz  
26 = 26.5 GHz (SMA, 2.4mm, 3.5mm only)



3.5mm Female (L), Ruggedized 3.5mm Female (R)



3.5mm Male (L), Ruggedized 3.5mm Male (R)

F = Feet M = Meters  
Connector Codes (2 or 3 Characters)

- BM = BNC Male
  - SM = SMA Male
  - S1T = SMA Male OneTurn™
  - SF = SMA Female
  - SMR = SMA Right Angle
  - 35M = 3.5mm Male
  - 35F = 3.5mm Female
  - 3RM = 3.5mm Ruggedized Male
  - 3RF = 3.5mm Ruggedized Female
  - 2RF = 2.4mm Ruggedized Female
  - NM = Type N Male
  - N1T = Type N Male OneTurn™
  - NF = Type N Female
  - NMR = Type N Right Angle
  - 70M = 7mm
  - 76M = 7-16 DIN Male
  - 76F = 7-16 DIN Female
  - TM = ETNC Male (Extended range)
  - TF = ETNC Female (Extended range)
  - QMM = QMA Male (changeable interface see pg. 4)
  - QMR = QMA Right Angle (changeable interface see pg. 4)
- First Connector
- Second Connector



Labels on unarmored assemblies under 1.5 feet long are left loose to increase flexibility.

Some connector combinations and/or lengths may be unavailable. Please contact Times or your Times authorized representative.

Specifications subject to change without notice.

# SilverLine™ Specifications:

## SilverLine™-QMA Changeable Interface System

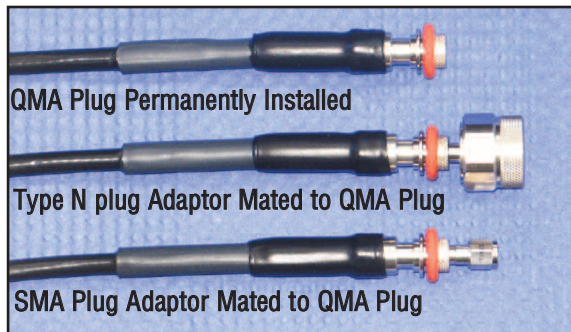

**NEW!** 18GHz QMA r/a  
with Quick Release


### Specifications:

- Frequency response: DC-18.0 GHz (QMA, QMA r/a, Type N, SMA and TNC)
- VSWR: 1:35:1 Maximum, 1:25:1 Typical (Cable Assembly with Mated Adaptor)


### Features & Benefits:

- High Frequency Operation
- 5000 Mate Life
- SureGrip™ Coupling Nut
- Smooth, Fast Retraction for Quick Changes
- Large Interface Selection
- Between Series & Reverse Polarity Interfaces

### Adaptors From QMA Jack To:

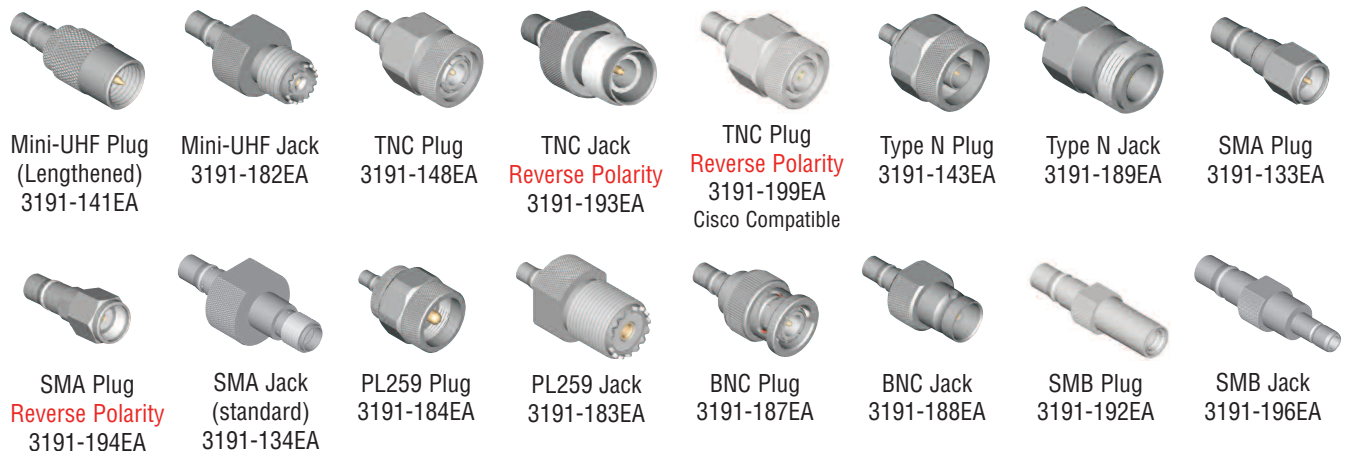

### Between & Within Series Adaptors and Termination

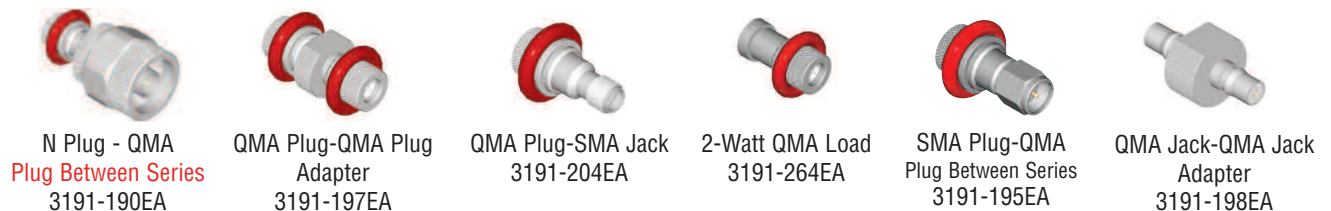

World Headquarters: 358 Hall Avenue, Wallingford, CT 06492 • Tel: 203-949-8400, 1-800-867-2629 Fax: 203-949-8423  
International Sales: 4 School Brae, Dysart, Kirkcaldy, Fife, Scotland KY1 2XB UK • Tel: +44(0)1592655428 Fax: +44(0)1592653162  
China Sales: 16F United Plaza, West Nanjing Road, Shanghai, China 200040 • Tel: 86-21-32224506 Fax: 86-21-62898980  
[www.timesmicrowave.com](http://www.timesmicrowave.com)