

Panel Jack Receptacle—Tab Contact

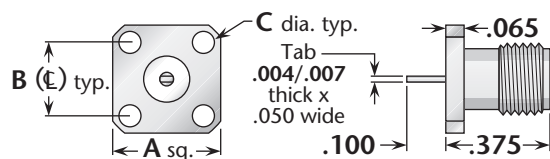


Figure 1
(3/8" square flange)

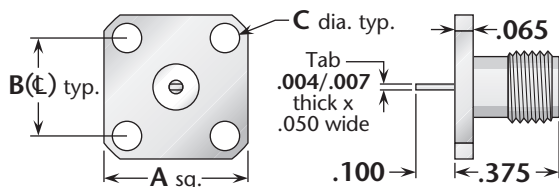


Figure 2
(1/2" square flange, SMA standard flange size)

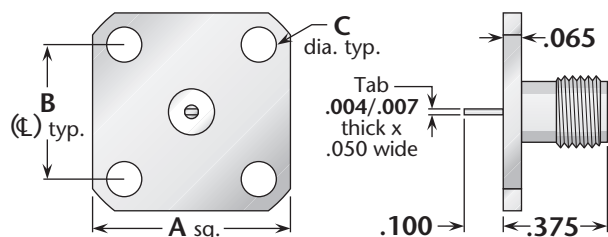


Figure 3
(11/16" square flange, interchangeable with BNC and TNC standard flange size)

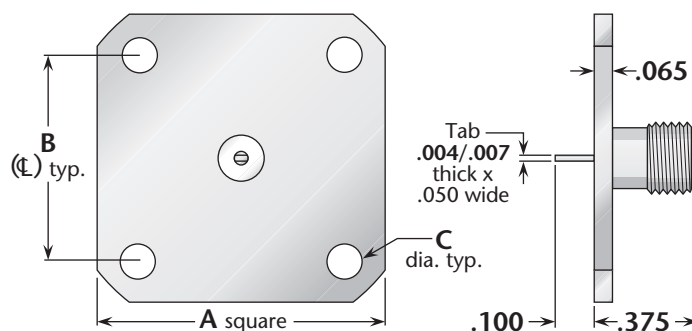


Figure 4
(1" square flange, interchangeable with type N standard flange size)

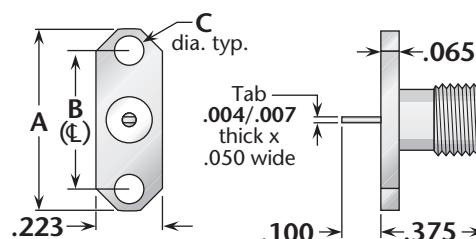


Figure 5
(2-hole flange)

Figure	Dimensions			Mounting Figure	Plating		Delta P/N
	A	B	C		Body	Contact	
1	.375	.250	.067	91	Gold	Gold	1358-000-G910-2
1	.375	.250	.067	91	Passivated	Gold	1358-000-K910-2
1	.375	.250	.067	91	Gold	Gold (C)	1358-000-G911-59
1	.375	.250	.067	91	Passivated	Gold (C)	1358-000-K911-59
2	.500	.340	.102	05	Gold	Gold	1358-000-G050-5
2	.500	.340	.102	05	Passivated	Gold	1358-000-K050-5
2	.500	.340	.102	05	Gold	Gold (C)	1358-000-G051-3
2	.500	.340	.102	05	Passivated	Gold (C)	1358-000-K051-3
3	.687	.500	.125	09	Gold	Gold	1358-000-G090-1
3	.687	.500	.125	09	Passivated	Gold	1358-000-K090-1
3	.687	.500	.125	09	Gold	Gold (C)	1358-000-G091-8
3	.687	.500	.125	09	Passivated	Gold (C)	1358-000-K091-8
4	1.00	.718	.125	33	Gold	Gold	1358-000-G330-1
4	1.00	.718	.125	33	Passivated	Gold	1358-000-K330-1
4	1.00	.718	.125	33	Gold	Gold (C)	1358-000-G331-2
4	1.00	.718	.125	33	Passivated	Gold (C)	1358-000-K331-2
5	.625	.481	.102	92	Gold	Gold	1358-000-G920-3
5	.625	.481	.102	92	Passivated	Gold	1358-000-K920-3
5	.625	.481	.102	92	Gold	Gold (C)	1358-000-G921-63
5	.625	.481	.102	92	Passivated	Gold (C)	1358-000-K921-63

See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact (epoxy captivated).
All items available with other flange, contact, and insulator configurations.