

Straight Plug—Military Clamp for Flexible Cable

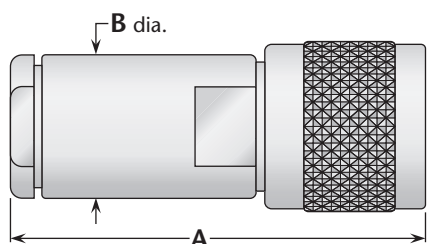


Figure 1




Figure 2

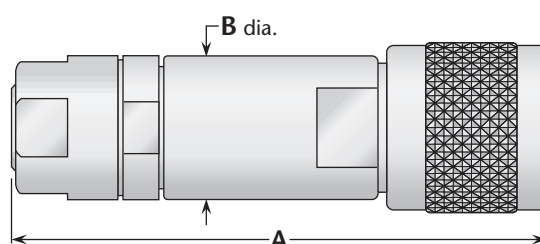


Figure 3 (Includes armor clamp)

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2, 3	1	2.38	.69	Nickel	Silver	UG-59B/U	***
2, 3	1	2.25	.75	Nickel	Silver	UG-59E/U	A/26
2, 3	1	2.81	.69	Nickel	Silver (C)	UG-1213/U	***
4	1	2.23	.75	Nickel	Silver (C)	1601-079-N001	***
5, 6	2	1.50	.50	Nickel	Silver	1601-015-N000	A/17
15	3	2.84	.75	Nickel	Silver	UG-925B/U	D/05
16	1	2.41	.88	Nickel	Silver	UG-494B/U	A/27
17	1	2.59	1.31	Nickel	Silver	UG-495D/U	A/28
17	3	3.53	1.31	Nickel	Silver	UG-1148/U	***
20	3	3.20	1.31	Nickel	Silver	UG-926A/U	D/06

Right Angle Plug—Military Clamp for Flexible Cable

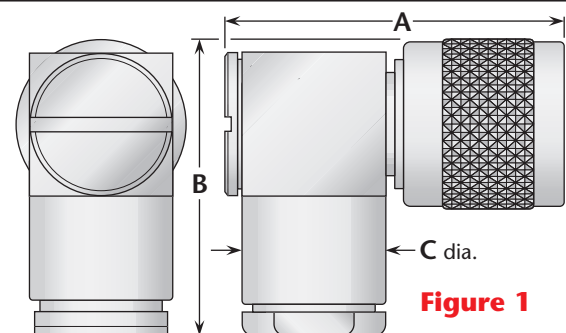


Figure 1

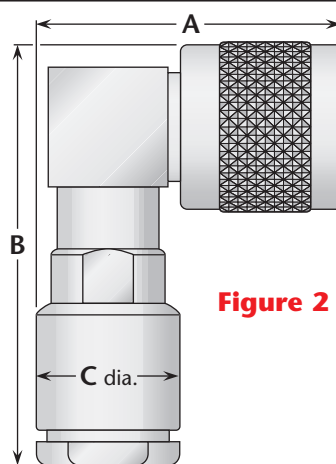


Figure 2

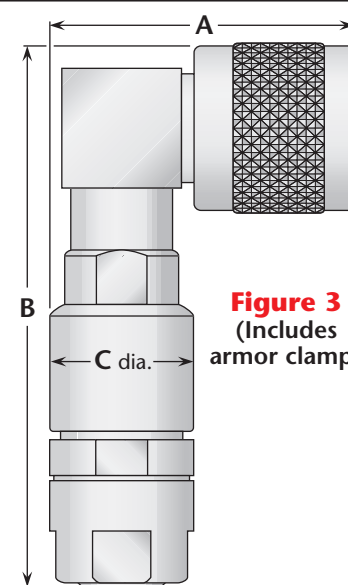


Figure 3
(Includes armor clamp)

Cable Group	Figure	Dimensions			Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C	Body	Contact		
2, 3	1	1.73	1.63	.75	Nickel	Silver (C)	1605-004-N001-2	A/29
2, 3	2	1.53	2.25	.69	Nickel	Silver (C)	1604-004-N001	***
2, 3	2	1.56	2.48	.75	Nickel	Silver	1604-005-N000	A/27
4	2	1.56	2.48	.75	Nickel	Silver (C)	1604-079-N001-1	***
15	3	1.56	3.05	.75	Nickel	Silver	1604-006-N000	D/05

See page 204 for cable groups. • Assembly procedures start on page 205. • ***Contact factory for cable assembly instructions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.