

Straight and Right Angle Plugs—For Flexible Cable




Figure 1
(Wedge clamp)




Figure 2
(Wedge clamp)




Figure 3
(Military clamp)




Figure 4
(Military clamp)

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
5	1	.94	.344	Gold	Gold	UG-1366/U	***
5	3	.90	.34	Gold	Gold	4401-018-G000	A/33
5, 6	4	.85	.73	Gold	Gold (C)	4404-015-G000	***
6	1	.94	.406	Gold	Gold	UG-1412/U	***
6	2	.94	.406	Gold	Gold (C)	4401-013-G005	***
6	3	.90	.34	Gold	Gold	4401-013-G000	A/33
7	2	.94	.50	Gold	Gold (C)	4401-019-G005	***
8A	2	.94	.344	Gold	Gold (C)	4401-029-G005	***
8B	3	.90	.34	Gold	Gold	4401-043-G000	A/33
9	2	.94	.344	Gold	Gold (C)	4401-036-G005	***
9	3	.90	.34	Gold	Gold	4401-036-G000	***
9	4	.91	.73	Gold	Gold (C)	4404-036-G000	A/34

Straight and Bulkhead Jacks—For Flexible Cable

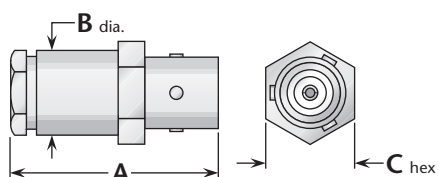


Figure 1
(Military clamp)

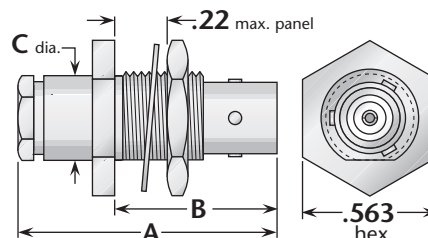


Figure 2
(Rear mount, wedge clamp)

Cable Group	Fig.	Dimensions			Mounting Figure	Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C		Body	Contact		
5, 6	1	.88	.34	.375	—	Gold	Gold	4408-013-G000	A/33
5, 6	2	1.05	.68	.41	62	Gold	Gold	UG-1413/U	***
7	1	.88	.34	.375	—	Gold	Gold	4408-019-G000	A/33
7	2	1.05	.68	.41	62	Gold	Gold	4416-019-G620	***
9	1	.88	.34	.375	—	Gold	Gold	4408-036-G000	A/33
9	2	.91	.68	.34	62	Gold	Gold (C)	4416-036-G620	***
11	2	.96	.68	.34	62	Gold	Gold (C)	4416-038-G620	***

See page 204 for cable groups. • Assembly procedures start on page 205. • ***Contact factory for cable assembly instructions.
See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact.
See page 6 for alternate body plating information.