

M39012/04—N Receptacles

Figure 1 (Bulkhead jack, hermetically sealed)


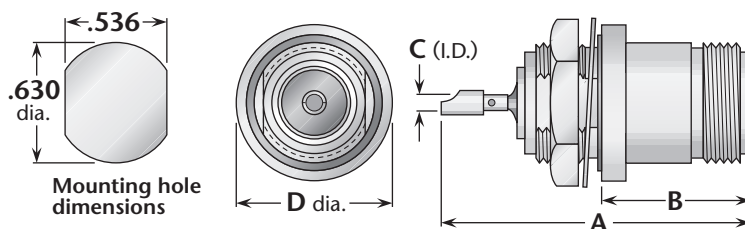



Figure 2 (Panel jack)

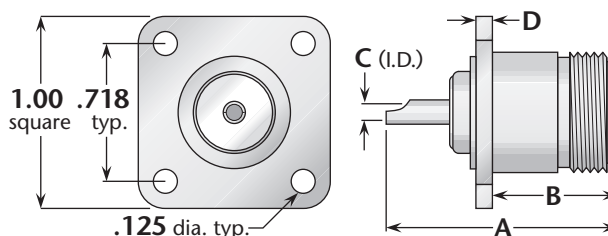

M39012 P/N	Figure	Dimensions				Maximum Panel	Plating	
		A	B	C	D		Body	Contact
M39012/04-0001	1	1.62	.707	.099	.812	.100	Silver	Gold (C)
M39012/04-0002	2	1.13	.66	.100	.080	.110	Silver	Gold (C)

M39012/05—N Right Angle Plug

Figure 1

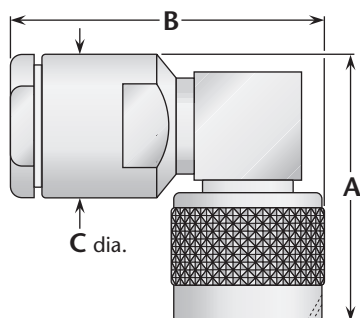

Coupling nut detail



M39012 P/N	Category	Cable Group	Figure	Dimensions			Plating		Assembly Procedure/ Trim Code
				A	B	C	Body	Contact	
M39012/05-0101	A	X	1	1.36	1.66	.75	Silver	Gold (C)	A / 07

M39012/25—N Dust Caps

Figure 1 (Cap for N jack)


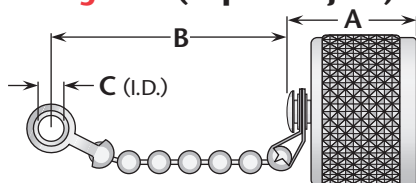


Figure 2 (Cap for N jack)

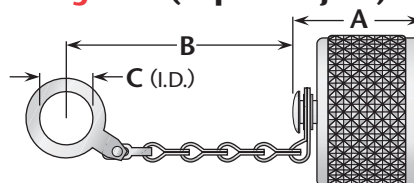

M39012 P/N	Figure	Dimensions			Chain Type	Plating	
		A	B	C		Body	Contact
M39012/25-0011	1	.56	2.50	.144	Bead	Silver	—
M39012/25-0012	2	.56	3.75	.635	Safety	Silver	—

See page 185 for cable groups and category definitions. • Assembly procedures start on page 205. • (C) indicates captive contact.