
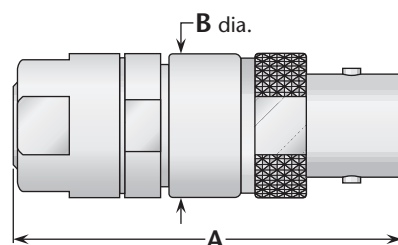


Straight Jack—Military Clamp for Flexible Cable

Figure 1

Figure 2
(Includes armor clamp)


Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
1	1	1.41	.75	Nickel	Silver	UG-633A/U	A/20
2, 3	1	1.41	.75	Nickel	Silver	UG-572A/U	A/20
2, 3	1	1.41	.75	Nickel	Silver (C)	1408-004-N001	A/01
15	2	2.00	.75	Nickel	Silver	UG-944A/U	D/04

Bulkhead Jack—Military Clamp for Flexible Cable

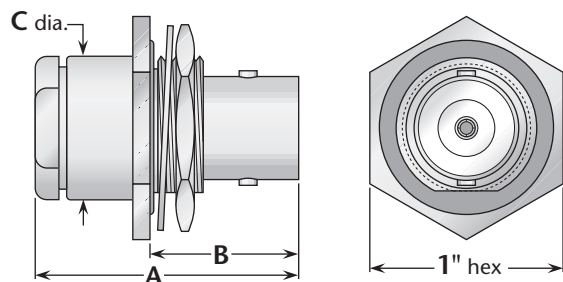
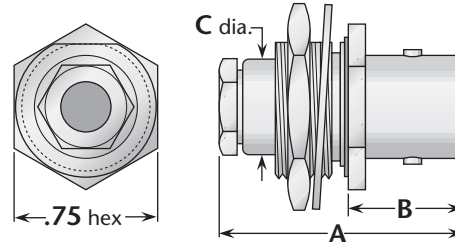
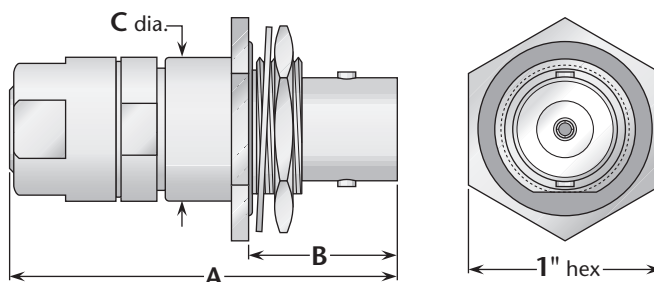

Figure 1
(Rear mount)

Figure 2
(Front mount)

Figure 3
(Rear mount;
Includes armor clamp)


Cable Group	Fig.	Dimensions			Mounting Figure	Max. Panel	Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C			Body	Contact		
1	1	1.41	.75	.75	51	.125	Nickel	Silver	UG-630A/U	A/20
2, 3	1	1.41	.75	.75	51	.125	Nickel	Silver	UG-570A/U	A/20
2, 3	1	1.72	.75	.75	51	.125	Nickel	Silver	UG-632A/U*	A/21
2, 3	1	1.41	.75	.75	51	.125	Nickel	Silver (C)	1416-004-N511	A/01
5, 6	2	1.25	.59	.50	54	.190	Nickel	Silver	UG-704B/U	A/25
7	2	1.25	.59	.50	54	.190	Nickel	Silver	UG-631A/U	A/22
15	3	2.00	.75	.75	51	.125	Nickel	Silver	UG-937A/U	D/04

* High-voltage type.

See page 204 for cable groups. • Assembly procedures start on page 205. • See page 203 for mounting dimensions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.