


Product	Polzahl: 3, Kabellänge 2 m, Kabel: 3 x 0,34 mm², PVC, Kabeldose umspritzt
Area	M12-A Series 763 FOOD & BEVERAGE
Article number	77 3730 0000 20403-0200


Illustration



Scale drawing

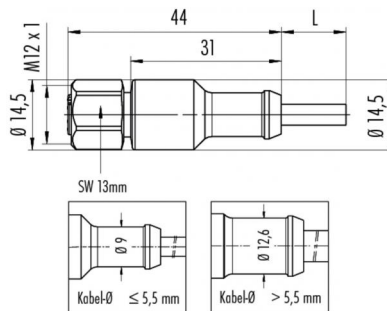

Contact Arrangement



- | | |
|---|---------------|
| 1 | braun/brown |
| 2 | weiß/white |
| 3 | blau/blue |
| 4 | schwarz/black |

Technical data

General features

Connector Design	Cable Connector
Connector locking system	bolted
Wire gauge (mm)	0,34 mm ²
Wire gauge (AWG)	(22)
Upper temperature	105 °C
Lower temperature	-40 °C

Cable data

material housing	PVC
Insulation single lead	PVC
Single lead structure	42 x 0,1
Cable sheath Ø	4,5
Conductor resistance	57 Ω/Km
Temperature range cable movable °C from	-5
Temperature range cable movable °C to	105
Temperature range cable fixed °C from	-40
Temperature range cable fixed °C to	105
Bending radius cable fixed	min. 5 x D
Bending radius cable movable	min. 10 x D
Approval 1	UL listed
Approval 2	Ecolab
Cable diameter	4,5

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP69K
Mechanical operation	> 100 Mating cycles

Material

Material of contact	CuSn (Bronze)
Contact plating	Au (gold)
Material of contact body	PP
Material of housing	PP