


Straight Jack—Crimp Type for Flexible Cable

Figure 1



Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2	1	1.64	.60	Silver	Gold (C)	M39012/02B0008	B/10
2	1	1.64	.60	Silver	Gold (C)	M39012/02-0502	B/03
2	1	1.47	.50	Nickel	Gold	1110-002-N000	B/10
2	1	1.60	.63	Nickel	Gold (C)	1110-002-N001	B/11
3	1	1.64	.60	Silver	Gold (C)	M39012/02B0009	B/10
3	1	1.64	.60	Silver	Gold (C)	M39012/02-0501	B/03
3	1	1.47	.50	Nickel	Gold	1110-005-N000	B/10
3	1	1.60	.63	Nickel	Gold (C)	1110-005-N001	B/10
6	1	1.56	.50	Nickel	Gold	1110-013-N000-1	B/12
6	1	1.54	.50	Silver	Gold (C)	M39012/02-0503	B/03

Straight Jack—Heli-Grip® for Flexible Cable

Figure 1





Figure 2



Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
2, 3	1	1.63	.75	Nickel	Gold (C)	1108-004-N005-2	E/01
5, 6 [§]	2	1.41	.50	Nickel	Gold (C)	1108-018-N005-2	E/02
RG-223	2	1.41	.50	Nickel	Gold (C)	1108-015-N005	E/02
7	2	1.41	.50	Nickel	Gold (C)	1108-019-N005-2	E/02
8	2	1.41	.50	Nickel	Gold (C)	1108-029-N005-1	E/02
9	2	1.41	.50	Nickel	Gold (C)	1108-037-N005-2	E/02

[§]Except RG-223/U.

Straight Jack—For Semi-Rigid Cable

Figure 1


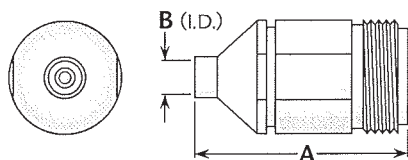


Figure 2



Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
12	1	1.07	.254	Silver	Gold	1108-050-A003-3	***
13	2	1.00	.143	Silver	Gold	1108-031-A003	***

See page 204 for cable groups. • Assembly procedures start on page 205. • ***Contact factory for cable assembly instructions. (C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.