

Panel Jack—Crimp Type for Flexible Cable

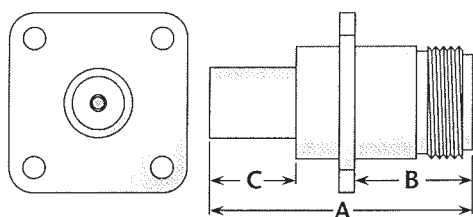


Figure 1 (Standard crimp type)

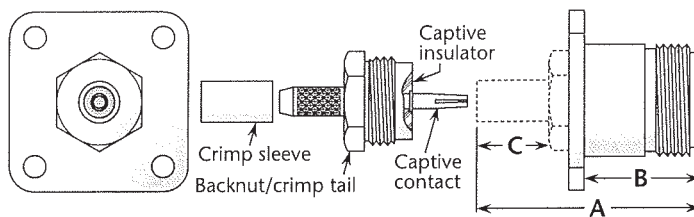


Figure 2 (Contact and insulator captive in backnut)

Cable Group	Fig.	Dimensions			Mounting Figure	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C		Body	Contact		
2	1	1.64	.66	.60	33	Silver	Gold (C)	M39012/02-0512	B/03
3	1	1.64	.66	.60	33	Silver	Gold (C)	M39012/02-0511	B/03
5	2	1.19	.595	.50	33	Nickel	Silver (C)	1155-017-N331	***
6	2	1.19	.595	.50	33	Nickel	Silver (C)	1155-013-N331	***
6	1	1.54	.66	.50	33	Silver	Gold (C)	M39012/02-0513	B/03
9	2	1.16	.595	.38	33	Nickel	Silver (C)	1155-037-N331	***

Panel Jack—For Semi-Rigid Cable

Figure 1
(Solder-clamp; gold-plated ferrule, nickel-plated body)

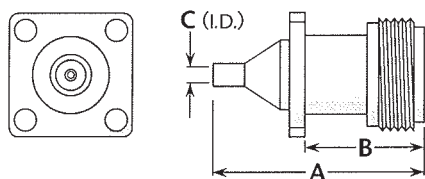
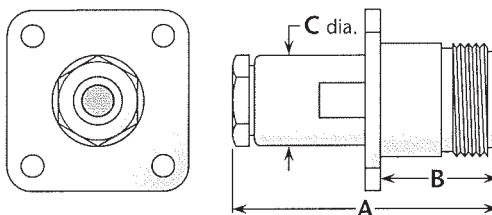


Figure 2 (One-Step cable attachment—see page 74 for details)

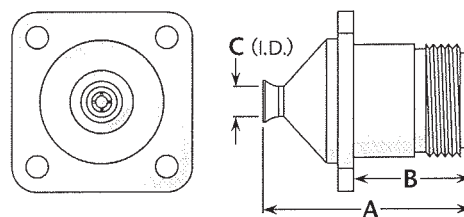


Figure 3 (One-Step cable attachment—see page 74 for details)

Cable Group	Fig.	Dimensions			Mounting Figure	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C		Body	Contact		
13	1	1.41	.66	.50	33	Nickel	Gold	1111-031-N333-1	F/05
13	2	1.11	.66	.143	09	Silver	Gold (C)	1111-031-A091-1	I/01
13	3	1.07	.64	.143	33	Silver	Gold (C)	1111-031-A333-4	I/01
14	1	1.41	.66	.50	33	Nickel	Gold	1111-025-N333	F/05
14	2	1.11	.66	.088	09	Silver	Gold (C)	1111-025-A091-1	I/01
14	3	1.07	.64	.088	33	Silver	Gold (C)	1111-025-A333-2	I/01

See page 204 for cable groups. • Assembly procedures start on page 205.

*** Contact factory for cable assembly instructions. • See page 203 for mounting dimensions.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.