

Panel Jack Receptacle—Post Contact

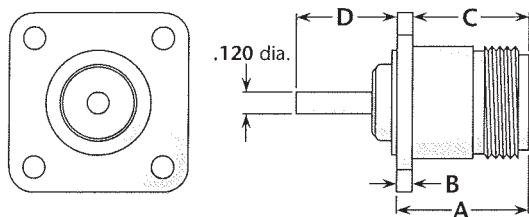


Figure 1

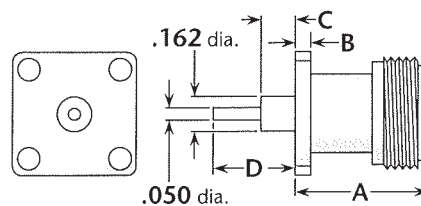


Figure 2

($11/16$ " square flange, interchangeable with BNC and TNC standard flange size)

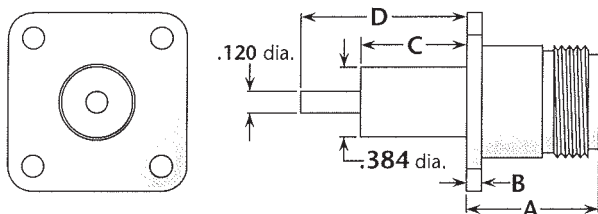


Figure 3

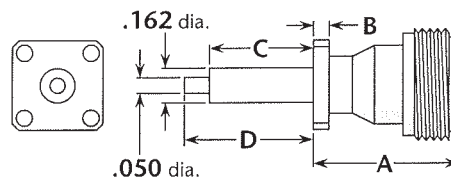


Figure 4

($1/2$ " square flange, interchangeable with SMA standard flange size)

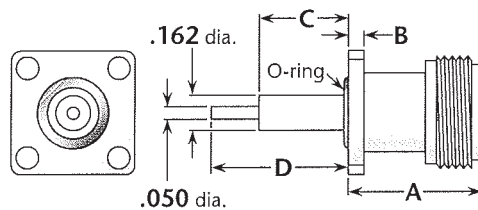


Figure 5

(O-ring seal on flange, $11/16$ " square flange, interchangeable with BNC and TNC standard flange size)

Figure	Dimensions				Mounting Figure	Plating		Delta P/N
	A	B	C	D		Body	Contact	
1	.736	.080	.66	.56	33	Nickel	Gold (C)	1113-000-N331-28
2	.735	.075	.125	.25	09	Nickel	Silver (C)	1143-000-N091-18
2	.735	.075	.125	.25	09	Nickel	Gold (C)	1143-000-N091-30
2	.735	.075	.590	.705	09	Nickel	Gold (C)*	1143-000-N091-69
3	.736	.080	.590	.705	33	Nickel	Gold	1143-000-N330-18
3	.736	.080	.590	.705	33	Nickel	Gold (C)*	1158-000-N331-15
4	.814	.080	.590	.705	05	Nickel	Gold (C)	1143-000-N051-2
5	.735	.075	.200	.450	09	Nickel	Gold (C)	1143-000-N091-59
5	.735	.075	.750	.875	09	Nickel	Gold (C)	1143-000-N091-73
5	.735	.075	.375	.425	09	Nickel	Gold (C)*	1143-000-N091-75

*Epoxy-captivated contact.

(C) in contact plating column indicates captive contact. • See page 203 for mounting dimensions.
• See page 6 for alternate body plating information. • All items are available with other flange sizes and contact configurations.