


Delta PressMount Receptacles

These connectors eliminate the need for complicated mounting hole patterns and mounting hardware. They are simply pressed into a single through hole, and the precisely-engineered knurled mounting section provides retention strength far greater than normal mating and unmating forces.

An integral shoulder provides a positive stop when mounting.

PressMounts can be used in packages as small as the outer diameter of the connector body.

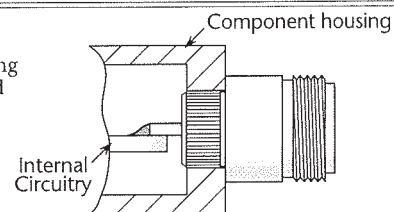

PressMount Receptacles—Jack Type

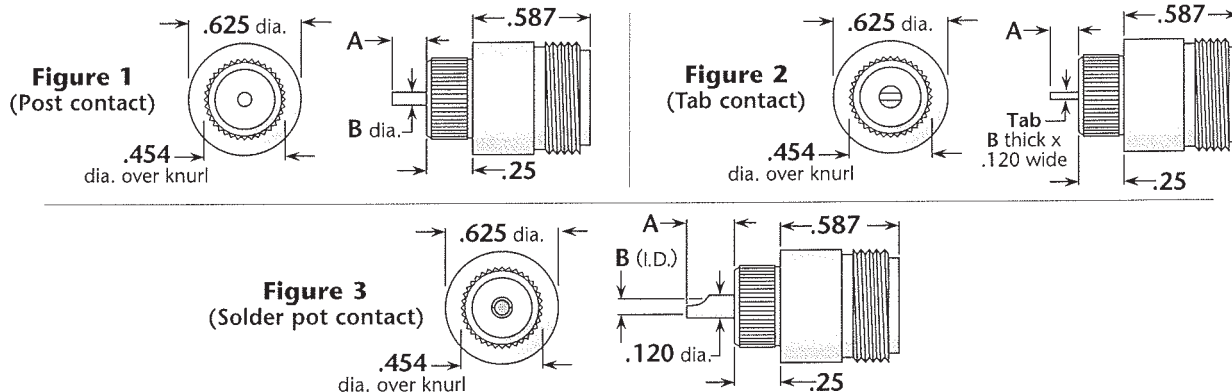


Figure	Dimensions		Min. Panel	Mounting Hole	Plating		Delta P/N
	A	B			Body	Contact	
1	.110	.050	.200	.450 ±.001 dia.	Nickel	Gold (C)	1120-000-N911-2
2	.100	.005/.008	.200	.450 ±.001 dia.	Nickel	Gold (C)	1120-000-N911-3
3	.285	.100	.200	.450 ±.001 dia.	Nickel	Gold (C)	1120-000-N911-4

PressMount Receptacles—Plug Type

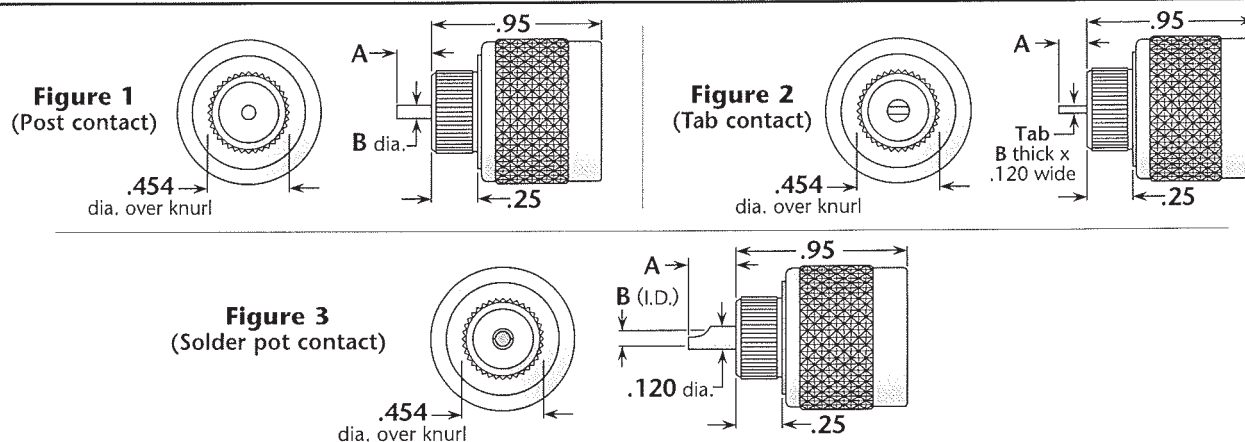


Figure	Dimensions		Min. Panel	Mounting Hole	Plating		Delta P/N
	A	B			Body	Contact	
1	.110	.050	.200	.450 ±.001 dia.	Nickel	Gold (C)	1124-000-N911-1
2	.100	.005/.008	.200	.450 ±.001 dia.	Nickel	Gold (C)	1124-000-N911-2
3	.250	.100	.200	.450 ±.001 dia.	Nickel	Gold (C)	1124-000-N911

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.
All items are available with other flange sizes and contact configurations.