

Straight Plug—Heli-Grip® for Flexible Cable







Figure 1

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
5, 6 [§]	1	1.09	.50	Nickel	Silver (C)	1201-018-N005	E/03
RG-223	1	1.09	.50	Nickel	Silver (C)	1201-015-N005	E/03
7	1	1.09	.50	Nickel	Silver (C)	1201-019-N005	E/03
8A	1	1.09	.50	Nickel	Silver (C)	1201-029-N005	E/03
8B	1	1.09	.50	Nickel	Silver (C)	1201-043-N005	E/03
9	1	1.09	.50	Nickel	Silver (C)	1201-037-N005	E/03
10	1	1.09	.50	Nickel	Silver (C)	1201-100-N005	E/03
11	1	1.09	.50	Nickel	Silver (C)	1201-038-N005	E/03

[§]Except RG-223/U.

Straight Plug—Crimp Type for Flexible Cable

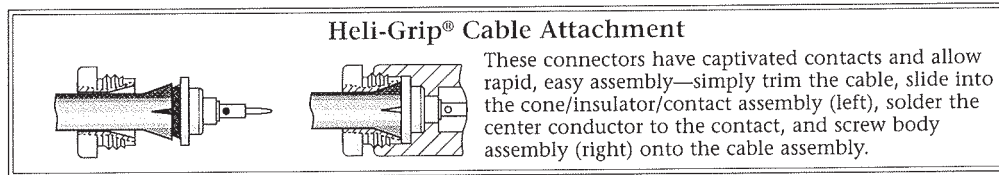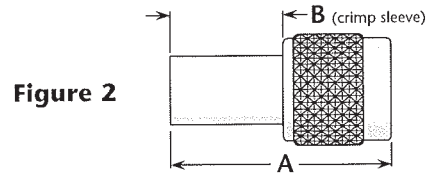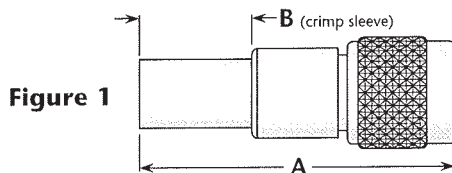

See page 198 for MIL-PRF-39012 QPL version.

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
3A, 4	1	1.75	.63	Nickel	Gold	1203-005-N000	B/11
5	2	1.06	.50	Nickel	Gold	1203-017-N000	B/23
6	2	1.06	.50	Nickel	Gold	1203-013-N000	B/23
7	2	1.06	.50	Nickel	Gold	1203-020-N000	B/23
7	2	1.04	.50	Nickel	Silver	1203-020-N000-3*	***
7	2	1.04	.50	Nickel	Gold	1203-020-N000-5*	***
7	2	1.06	.50	Nickel	Gold (C)	1203-020-N001-3*	***

* Crimp center contact.

See page 204 for cable groups. • Assembly procedures start on page 205.
(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.
***Contact factory for cable assembly instructions.