

Bulkhead Jacks—For Flexible and Semi-Rigid Cable

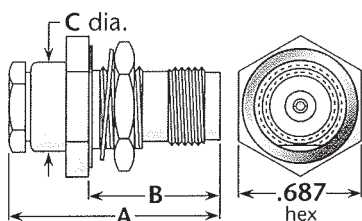


Figure 1
(Rear mount)


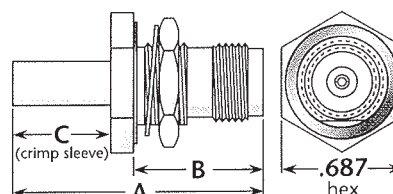


Figure 2
(Rear mount)

See page 199 for MIL-PRF-39012 QPL versions.

Heli-Grip® Cable Attachment (where noted)



These connectors have captivated contacts and allow rapid, easy assembly—simply trim the cable, slide into the cone/insulator/contact assembly (left), solder the center conductor to the contact, and screw body assembly (right) onto the cable assembly.

Military Clamp for Flexible Cable

Cable Group	Fig.	Dimensions			Mounting Figure	Max. Panel	Plating		Delta P/N	Assembly Procedure/Trim Code
		A	B	C			Body	Contact		
5, 6	1	1.16	.68	.50	59	.11	Nickel	Gold	1216-015-N590	A/17
5, 6	1	1.16	.68	.50	59	.11	Nickel	Gold (C)	1216-015-N591	A/17
5, 6	1	1.16	.81	.50	59	.24	Nickel	Gold (C)	1216-015-N59E	A/17
7	1	1.16	.68	.50	59	.11	Nickel	Gold	1216-021-N590-2	A/17
7	1	1.16	.68	.50	59	.11	Nickel	Gold (C)	1216-021-N591	A/17
7	1	1.16	.81	.50	59	.24	Nickel	Gold (C)	1216-021-N59E	A/17
9	1	1.16	.68	.50	59	.11	Nickel	Gold	1216-036-N590	A/17
9	1	1.16	.68	.50	59	.11	Nickel	Gold (C)	1216-036-N591-5	A/18
11	1	1.16	.68	.50	59	.11	Nickel	Gold	1216-038-N590-2	A/18
11	1	1.16	.68	.50	59	.11	Nickel	Gold (C)	1216-038-N591-1	A/18

Heli-Grip for Flexible Cable

5, 6 [§]	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1216-018-N595	E/03
RG-223	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1216-015-N595-1	E/03
7	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1216-019-N595	E/03
8A	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1216-029-N595	E/03
8B	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1216-043-N595	E/03
9	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1216-037-N595	E/03
10	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1216-100-N595-2	E/03
11	1	1.16	.81	.50	59	.24	Nickel	Silver (C)	1216-038-N595	E/03

Crimp Type for Flexible Cable

5	2	1.31	.68	.50	59	.11	Nickel	Gold	1219-017-N590	B/13
6	2	1.31	.68	.50	59	.11	Nickel	Gold	1219-013-N590-2	B/13
7	2	1.31	.68	.50	59	.11	Nickel	Gold	1219-020-N590	B/13

Solder-Clamp for Semi-Rigid Cable

13	1	1.16	.68	.50	59	.11	Nickel*	Gold	1216-031-N593	F/08
14	1	1.16	.68	.50	59	.11	Nickel*	Gold	1216-025-N593	F/07

[§]Except RG-223/U.

* Solder ferrule is gold plated.

See page 204 for cable groups. • Assembly procedures start on page 205. • See page 203 for mounting dimensions.
(C) In contact plating column indicates captive contact. • See page 6 for alternate body plating information.