


PressMount Receptacles

Delta PressMount Receptacles



These connectors eliminate the need for complicated mounting hole patterns and mounting hardware.

They are simply pressed into a single through hole, and the precisely-engineered knurled mounting section provides retention strength far greater than normal mating and unmating forces. An integral shoulder provides a positive stop when mounting.

PressMounts are available for a wide variety of Delta connector series, and can be used in packages as small as the outer diameter of the connector body.

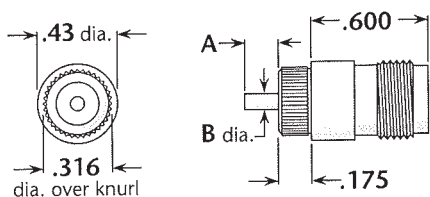


Figure 1
(Post contact)

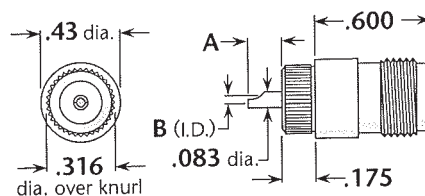


Figure 2
(Solder pot contact)

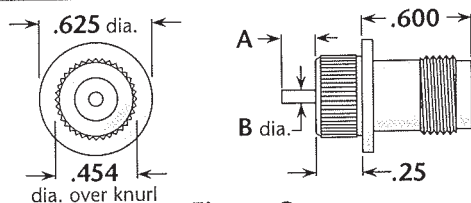


Figure 3
(Post contact)

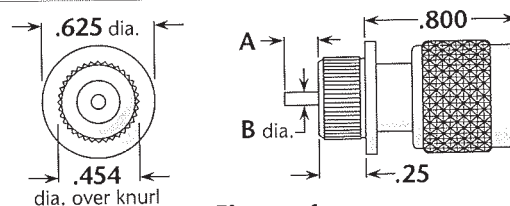


Figure 4
(Plug type, post contact)

Figure	Dimensions		Min. Panel	Mounting Hole	Plating		Delta P/N
	A	B			Body	Contact	
1	.062	.050	.150	.312 ±.001 dia.	Nickel	Gold (C)	1220-000-N911-2
2	.285	.062	.150	.312 ±.001 dia.	Nickel	Gold (C)	1220-000-N911-3
3	.060	.050	.200	.450 ±.001 dia.	Nickel	Gold (C)	1220-000-N911-5
4	.060	.050	.200	.450 ±.001 dia.	Nickel	Gold (C)	1224-000-N911-2

Stripline Receptacles

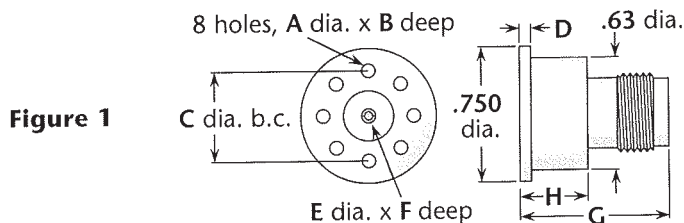


Figure	Dimensions								Plating		Delta P/N
	A	B	C	D	E	F	G	H	Body	Contact	
1	.078	.31	.500	.063	.063	.22	.828	.375	Nickel	Gold (C)	1256-000-N000-2
1	#2-56	.25	.500	.063	.063	.22	.828	.375	Nickel	Gold (C)	1256-000-N000-3

(C) in contact plating column indicates captive contact. • See page 6 for alternate body plating information.
All items are available with other flange sizes and contact configurations.