

Straight and Right Angle Plugs—For Semi-Rigid Cable




Figure 1
(Straight plug—direct solder)




Figure 2
(Straight plug—direct solder)




Figure 3
(Right angle plug—direct solder)

Cable Group	Figure	Dimensions		Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	Body	Contact		
13	1	.330	.344	Gold*	None ⁽¹⁾	1301-031-G003-502	G/01
13	2	.459	.330	Gold*	None ⁽¹⁾	1301-031-G003-501	G/01
13	2	.330	.459	Gold*	Gold	1301-031-G003-500	H/03
13	3	.46	.63	Gold*	Gold (C)	1305-031-G003-500	J/02
14	2	.330	.459	Gold*	Gold	1301-025-G003-500	H/03
14	3	.46	.63	Gold*	Gold (C)	1305-025-G003-500	J/02

⁽¹⁾ Cable center conductor used as contact.

Straight, Panel and Bulkhead Jacks—For Semi-Rigid Cable

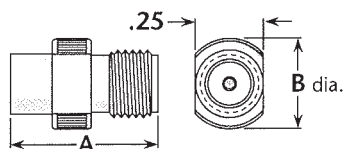


Figure 1
(Straight jack, direct solder)

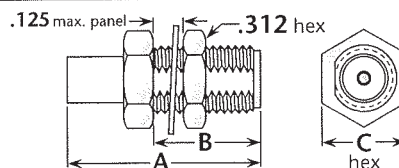


Figure 2
(Bulkhead mount, direct solder)

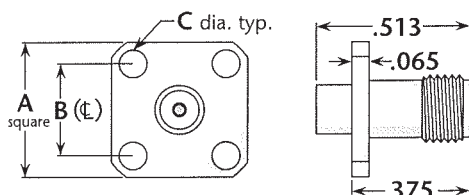


Figure 3
(4-hole flange, direct solder)

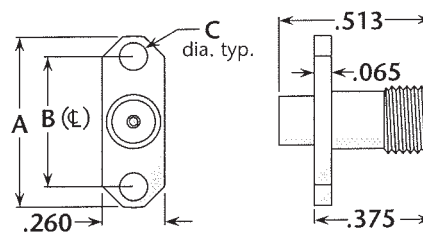


Figure 4
(2-hole flange, direct solder)

Cable Group	Fig.	Dimensions			Mounting Figure	Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C		Body	Contact		
13	1	.500	.335	—	—	Gold*	Gold	1308-031-G003-500	H/01
13	2	.850	.500	.312	67	Gold*	Gold	1317-031-G673-500	H/04
13	3	.500	.340	.102	05	Gold*	Gold	1311-031-G053-500	H/01
13	4	.625	.481	.102	92A	Gold*	Gold	1311-031-G923-500	H/01
14	1	.500	.335	—	—	Gold*	Gold	1308-025-G003-500	H/01
14	2	.850	.500	.312	67	Gold*	Gold	1317-025-G673-500	H/04
14	3	.500	.340	.102	05	Gold*	Gold	1311-025-G053-500	H/01
14	4	.625	.481	.102	92A	Gold*	Gold	1311-025-G923-500	H/01

* Also available with nickel-plated body—change G in Delta part number to N. • (C) in contact plating column indicates captive contact.
See page 204 for cable groups. • Assembly procedures start on page 205. • See page 203 for mounting dimensions.