

Straight Jack—For Flexible Cable

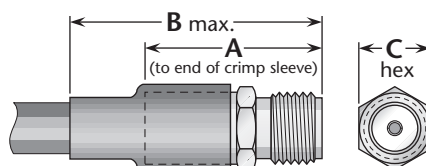


Figure 1
(Crimp type, shown with supplied heat-shrink tubing)

See page 195 for MIL-PRF-39012 QPL version.

Cable Group	Figure	Dimensions			Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C	Body	Contact		
5	1	.80	1.125	.25	Gold	Gold	1308-017-G000	K/03
5	1	.80	1.125	.25	Passivated	Gold	1308-017-K000	K/03
6	1	.80	1.125	.25	Gold	Gold	1308-013-G000	K/03
6	1	.80	1.125	.25	Passivated	Gold	1308-013-K000	K/03
9	1	.80	1.125	.25	Gold	Gold	1308-037-G000	K/03
9	1	.80	1.125	.25	Passivated	Gold	1308-037-K000	K/03

Bulkhead Jack—For Flexible Cable

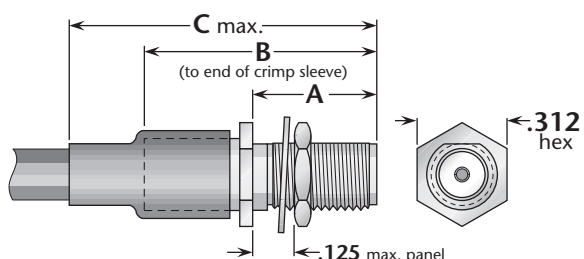


Figure 1
(Crimp type, shown with supplied heat-shrink tubing)

See page 196 for MIL-PRF-39012 QPL version.

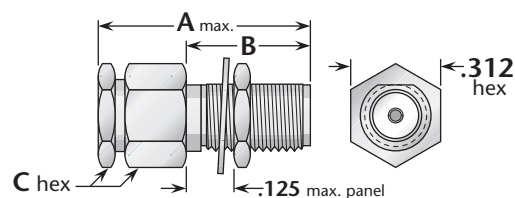


Figure 2
(Clamp type)

Cable Group	Fig.	Dimensions			Mounting Figure	Plating		Delta P/N	Assembly Procedure/ Trim Code
		A	B	C		Body	Contact		
5	1	.450	.94	1.25	67	Gold	Gold	1319-017-G670	K/04
5	1	.450	.94	1.25	67	Passivated	Gold	1319-017-K670	K/04
6	1	.450	.94	1.25	67	Gold	Gold	1319-013-G670	K/04
6	1	.450	.94	1.25	67	Passivated	Gold	1319-013-K670	K/04
9	1	.450	.94	1.25	67	Gold	Gold	1319-037-G670	K/04
9	1	.450	.94	1.25	67	Passivated	Gold	1319-037-K670	K/04
10	1	.450	.94	1.25	67	Gold	Gold	1319-100-G670	K/04
10	1	.450	.94	1.25	67	Passivated	Gold	1319-100-K670	K/04
5, 6	2	.850	.450	.312	67	Gold	Gold (C)	1316-015-G675	***
5, 6	2	.850	.450	.312	67	Passivated	Gold (C)	1316-015-K675	***
9	2	.850	.450	.312	67	Gold	Gold (C)	1316-037-G675	***
9	2	.850	.450	.312	67	Passivated	Gold (C)	1316-037-K675	***

See page 204 for cable groups. • Assembly procedures start on page 205. • ***Contact factory for cable assembly instructions.
See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact.