

Bulkhead Jack Receptacles

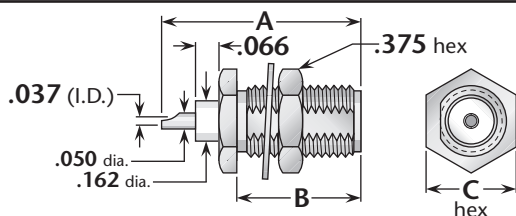


Figure 1 (Rear mount, solder pot contact, no mounting gasket)

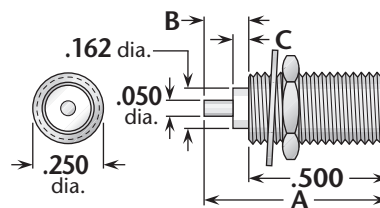


Figure 2 (Round body, post contact)

Figure	Dimensions			Max. Panel	Mounting Figure	Plating		Delta P/N
	A	B	C			Body	Contact	
1	.67	.450	.375	.125	67	Gold	Gold (C)	1321-000-G671-500
2	.66	.157	.075	.125	82	Gold	Gold (C)	1321-000-G821-500
2	.62	.118	.000	.125	82	Gold	Gold (C)	1321-000-G821-501

Printed-Circuit Board Receptacles

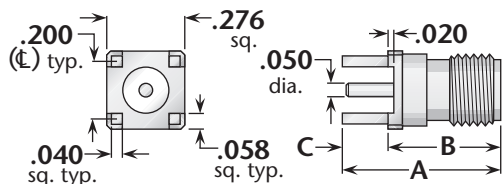


Figure 1 (Straight jack)

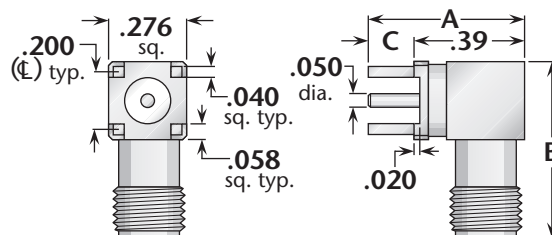


Figure 2 (Right angle jack)

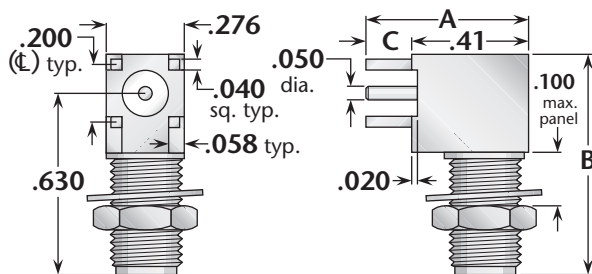


Figure 3 (Right angle bulkhead jack)

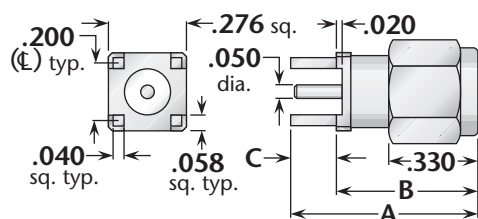


Figure 4 (Straight plug)

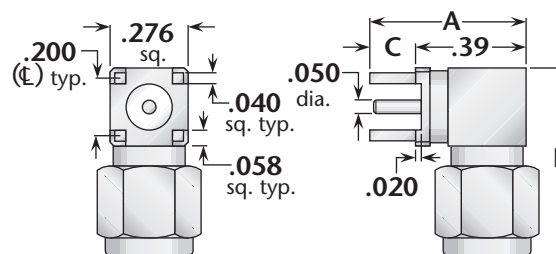


Figure 5 (Right angle plug)

Figure	Dimensions			Max. Board	Mounting Figure	Plating		Delta P/N
	A	B	C			Body	Contact	
1	.55	.394	.155	.125	PCB05	Gold*	Gold (C)	1367-000-G001-500
2	.54	.594	.155	.125	PCB05	Gold*	Gold (C)	1369-000-G001-500
3	.56	.756	.155	.125	PCB05/82	Gold*	Gold (C)	1369-000-G821-500
4	.65	.494	.155	.125	PCB05	Gold*	Gold (C)	1368-000-G001-500
5	.54	.65	.155	.125	PCB05	Gold*	Gold (C)	1370-000-G001-500

* Also available with nickel-plated body—change G in Delta part number to N.

See page 203 for mounting dimensions. • (C) in contact plating column indicates captive contact (mechanical captivation).