


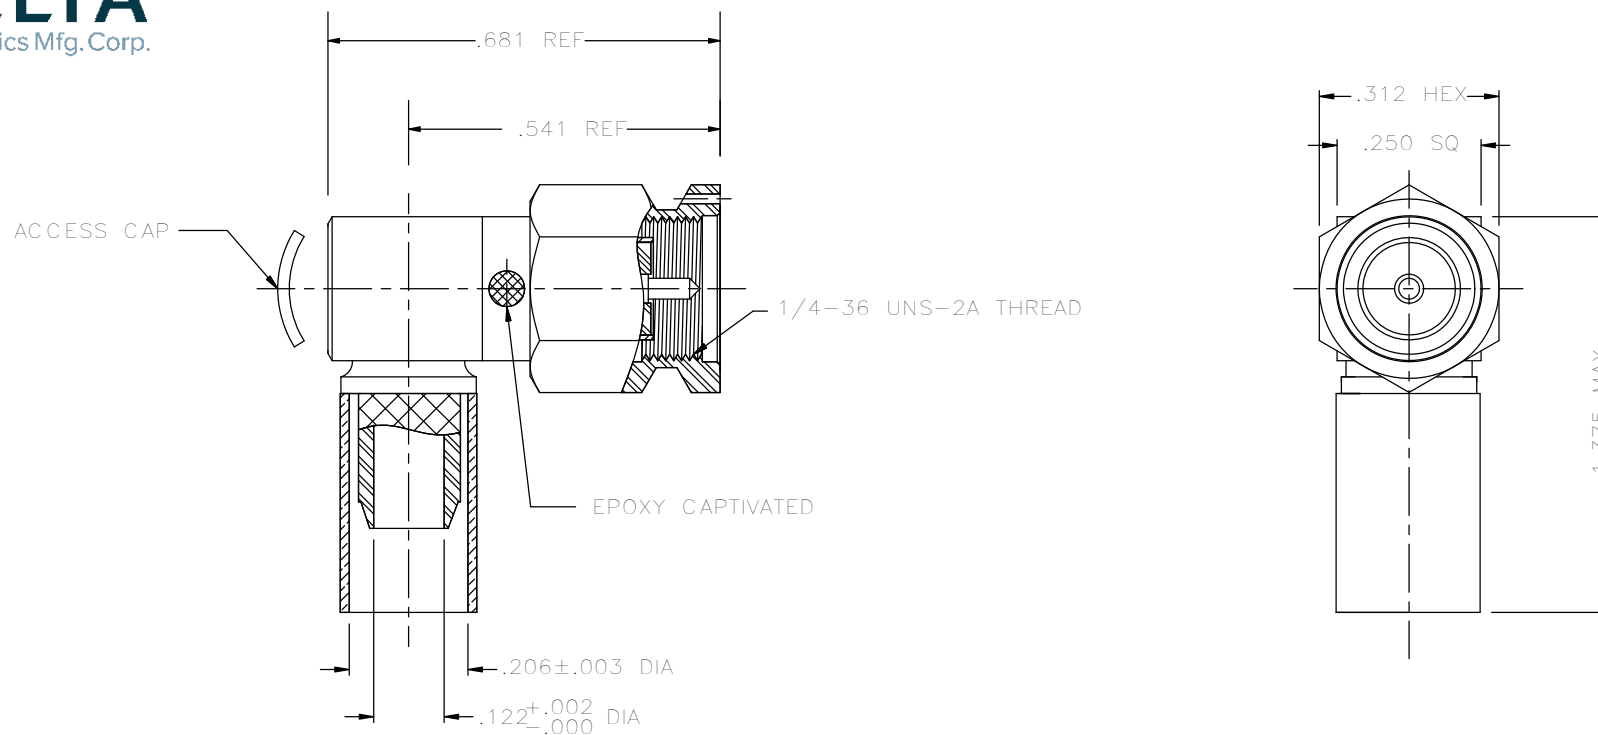

NOTES:

1. ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH MIL-STD-348.
2. MATERIAL: BODY & COUPLING NUT - CORROSION RESISTANT STEEL PER ASTM A582
CONTACT - BRASS PER ASTM B16.
GASKET - SILICONE RUBBER PER A-A-59588
INSULATORS - TEFLON PER ASTM D1710
CRIMP SLEEVE - D.H.P. COPPER CDA ALLOY 122
3. FINISHES: BODY & COUPLING NUT - PASSIVATE PER AMS-QQ-P-35
ACCESS CAP - NICKEL PLATE PER AMS-QQ-N-290
CONTACT - GOLD PLATE PER ASTM B488
CRIMP SLEEVE - SULFAMATE NICKEL PER MIL-P-27418

M39012/56-3129

UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACES = $\pm .003$, 2 PLACES = $\pm .02$, ANGLES = $\pm 1/2^\circ$, SURFACE FINISH = 63			DELTA ELECTRONICS MFG. CORP. Beverly, MA 01915				
ALT.			TITLE: SMA RIGHT ANGLE CRIMP PLUG FOR RG-58/U CABLE				
DATE			Drawn by SRC 7/25/17	Scale 3/1	Ckd. by ADK	Engr Appd BJM	FILE NAME: 1307017K00E-001T
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS MFG CORP. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.			CODE IDENT.-00795		1307017K00E-001		