
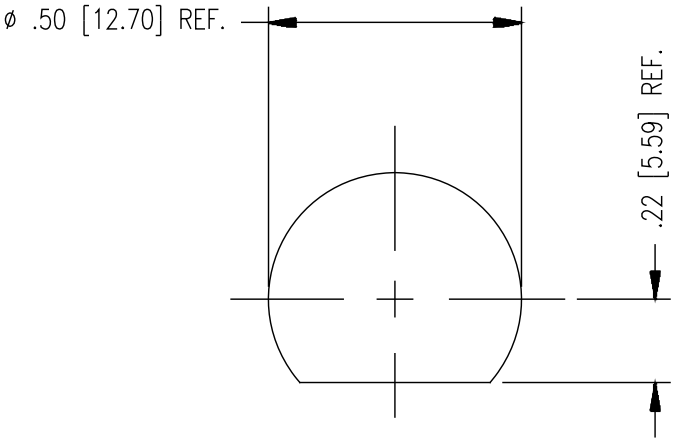
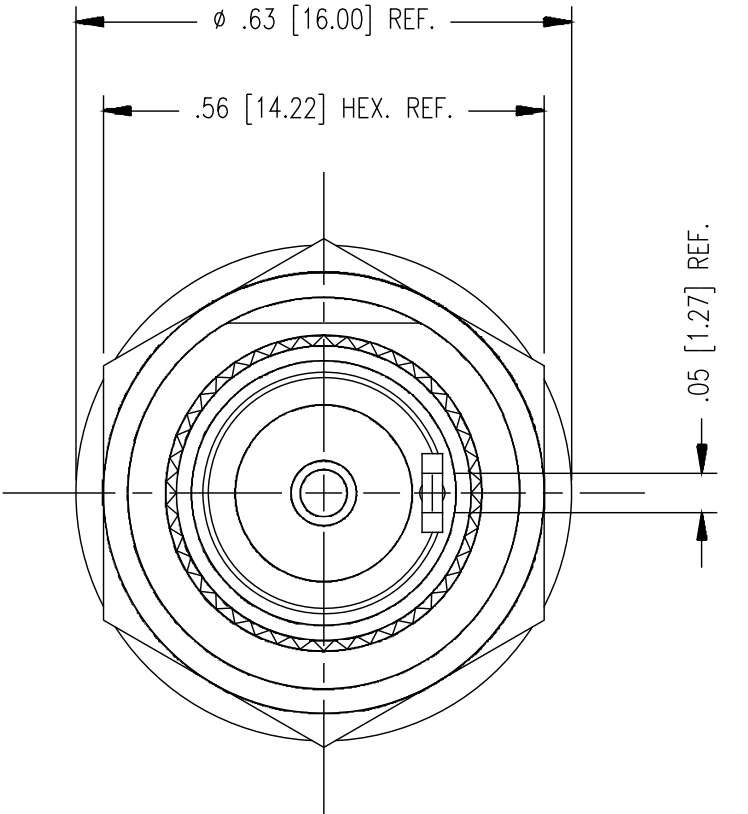


GSD

STAMP: 91836 M39012/128-0001
754-21-5 YRWK (DATE CODE)

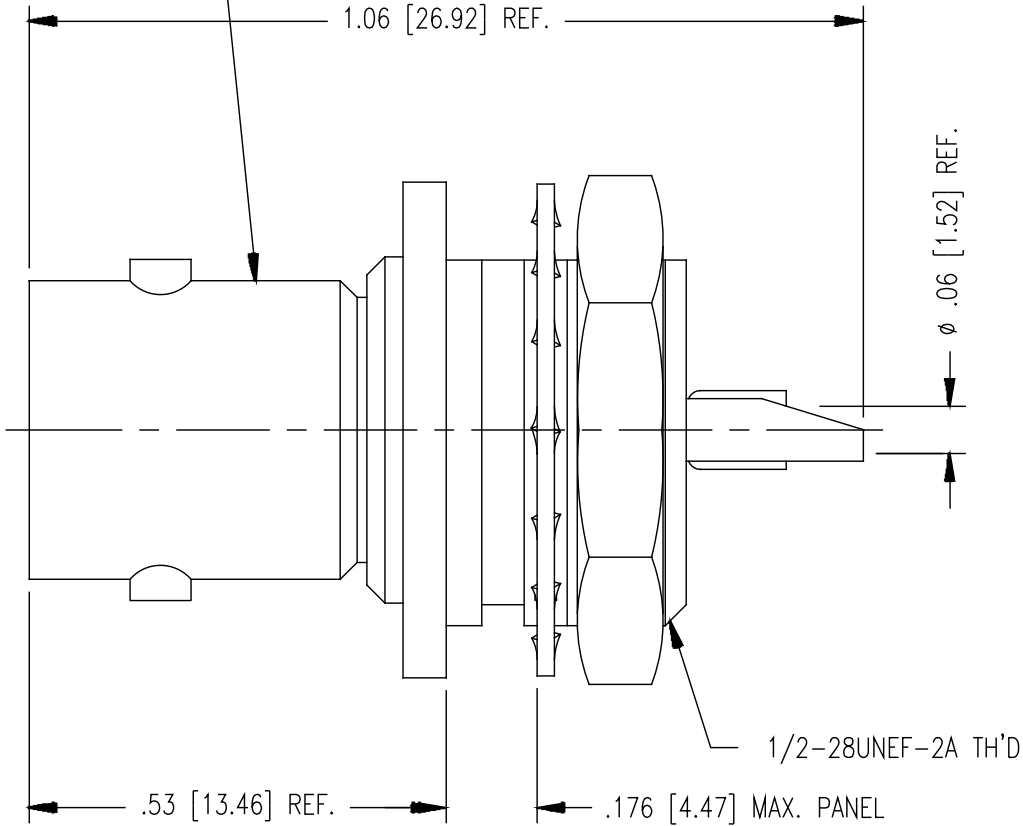

MOUNTING HOLE

M39012/128-0001

REVISIONS	
ISSUE	CHANGES
0	ER 29853 RESTRICTED USAGE AJ 05/13/88
1	CN 30424 E RESTRICTION REMOVED H.Z.B. 01/06/89
2	CN 32337 A LNM 07/09/90
3	CN 38656 C REDRAWN TML 09/25/03
4	CN 39721 C DRK 12/01/06
5	CN 39857 A DRK 03/23/07
G	ER062838 JI 06/17/16
H	ER064491 JI 09/02/16
J	ECO-13896 LA 06/16/21
SCALE 4:1	
APPROX SURFACE AREA	
754-21-5	
USED ON	
REF:	
RECEPTACLE, ISOLATED GROUND, BNC	
DRAWN JCA	DATE 07/14/88
DESIGN	DATE
APPR. MJB	DATE 07/14/88
Kings Win 245 Lynnfield St, Peabody, MA 01960	
M39012/128-0001	

GSD

- NOTES:
- INTERFACE PER MIL-STD-348, FIG. 301-2.
 - SAME AS KC-79-67 EXCEPT FINISH & MARKING.
 - MATERIALS:
INSULATORS: PTFE, ASTM-D4894
LOCKWASHER: PHOS. BRONZE, ASTM-B103
CENTER CONTACT: BER.COP., ASTM-B196
LUG: BER. COP. ASTM-B196, OR PHOS. BRONZE
ALL OTHER PARTS: BRASS, ASTM-B16
 - FINISHES:
CENTER CONTACT: GOLD PLATE, ASTM-B488.
ALL OTHER METAL PARTS: SILVER PLATE, ASTM-B700.
 - ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
INSULATION RESISTANCE: 5000 MEGAOHMS MIN.
CONTACT RESISTANCE: CENTER-2.0 MILLIOHMS MAX.
 - DIMENSIONS IN INCHES [MM].