


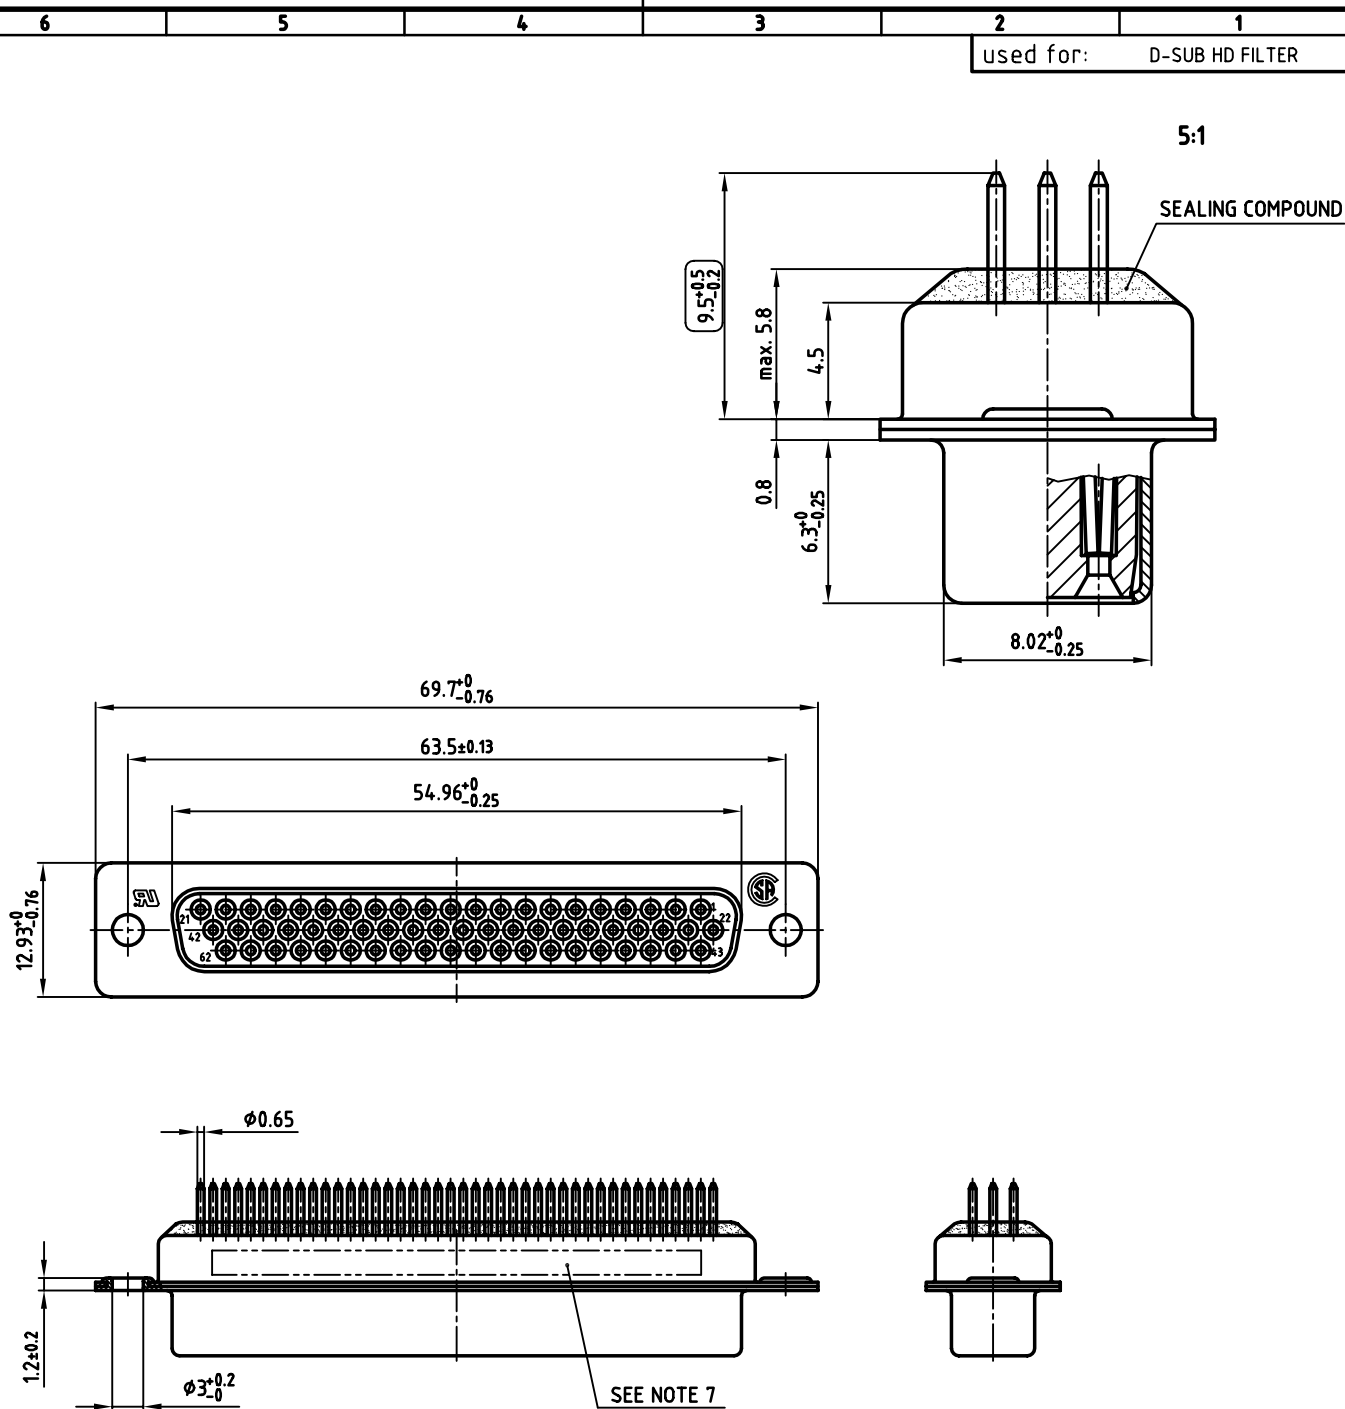

NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V11H6B
5. CAPACITANCE: SEE TABLE
6. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
7. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
8. = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF $\pm 20\%$	242A27410X
370pF $\pm 20\%$	242A18010X
830pF $\pm 20\%$	242A18050X

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

rev.	description	date	name

tolerance		 dim. in mm
2003	date	name
drawn	15.09.	Lehmenkühler
appd.	19.09.	Mickenbecker
norm	DIN 41652	
d-old		



scale:		2:1 (5:1)	
material:		SEE NOTES	
title:			
D-SUB HD FILTER FEMALE 62pos. SOLDER PIN STRAIGHT			
dwg no:		AutoCAD 2000	DIN-A
24K1A434		3	sh: 1/1
part no:		SEE TABLE	