

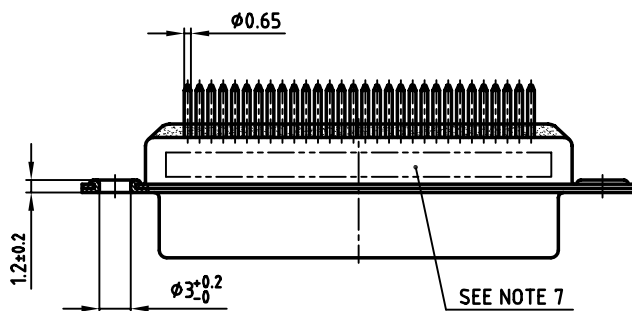
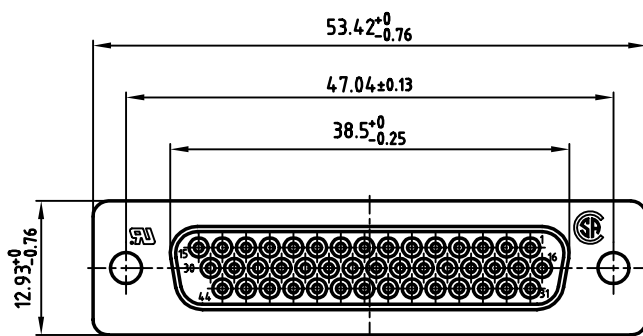


used for:	D-SUB HD FILTER
-----------	-----------------

5:1

SEALING COMPOUND

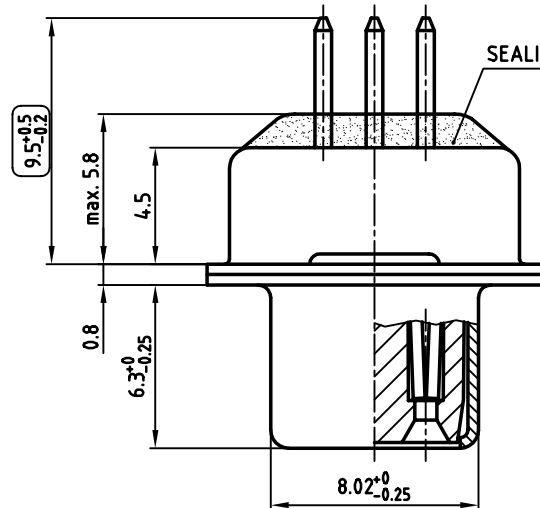

NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1IH6B
5. CAPACITANCE: SEE TABLE
6. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
7. CONNECTOR IS PART MARKED:

PART-NO.	CONEC	Y/WW
----------	-------	------
8.

--

 = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF $\pm 20\%$	242A27400X
370pF $\pm 20\%$	242A18000X
830nF $\pm 20\%$	242A18040X

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		 dim. in mm
2003	date	name
drawn	16.09.	Lehmenkühler
appd.	19.09.	Mickenbecker
norm	DIN 41652	
d-old		

CONEC®

scale:		2:1 (5:1)	
material:		SEE NOTES	
title:			
D-SUB HD FILTER FEMALE 44pos. SOLDER PIN STRAIGHT			
dwg no:		AutoCAD 2000	DIN-A
24K1A441		3	
		sh: 1/1	
part no:		SEE TABLE	