

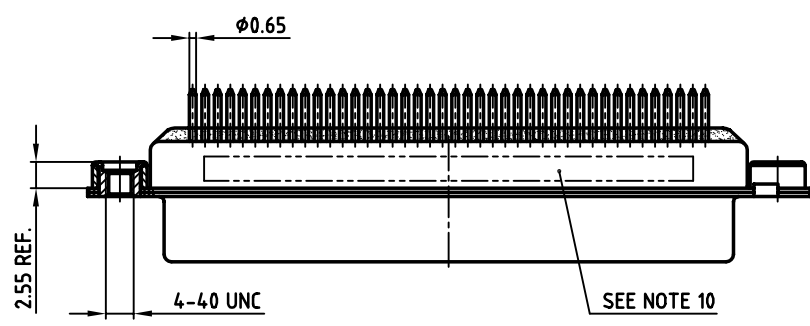
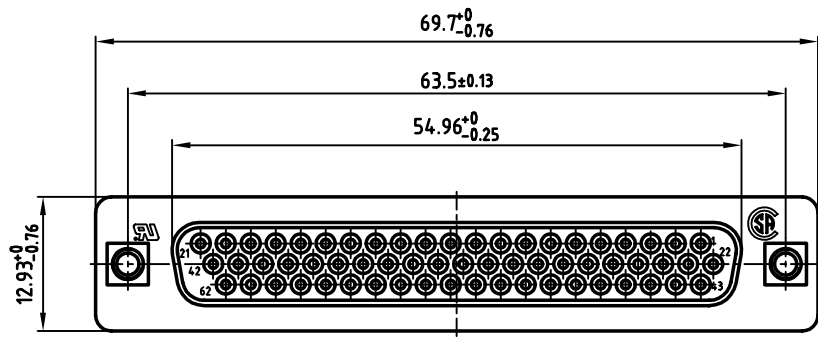


6 5 4 3 2 1 used for: D-SUB HD FILTER

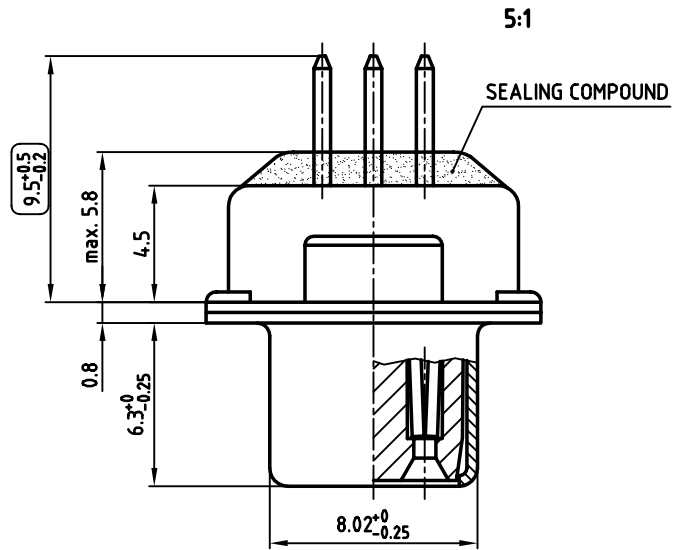

- NOTES:**
- 1. METAL SHELLS: STEEL; min. 320µ" TIN
 - 2. INSULATORS: PBT GF UL 94 V-0, BLACK
 - 3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
 - 4. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
 - 5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
 - 6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1H6B
 - 7. CAPACITANCE: SEE TABLE
 - 8. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
 - 9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
 - 10. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/W/W
 - 11. = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF ±20%	242A27450X
370pF ±20%	242A18090X
830pF ±20%	242A18130X

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

tolerance				scale: 2:1 (5:1)	
dim. in mm		material:		SEE NOTES	
2003		date		name	
drawn		15.09.		Lehmenkühler	
appd.		19.09.		Mickenbecker	
norm		DIN 41652		title:	
d-old				D-SUB HD FILTER FEMALE	
rev.		description		62pos. SOLDER PIN STRAIGHT	
date		name		with threaded insert	
				dwg no: AutoCAD 2000	
				24K1A435	
				part no: SEE TABLE	
				DIN-A 3 sh: 1/1	