

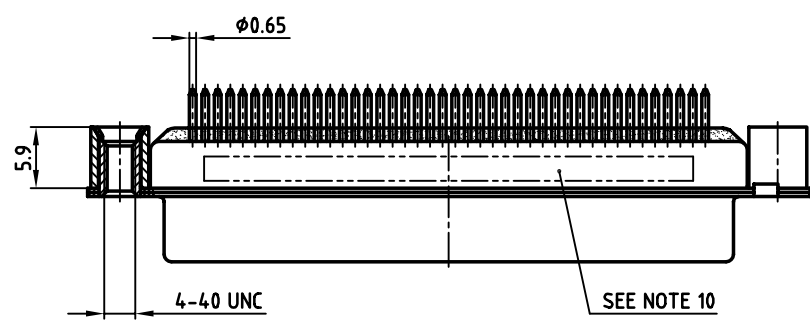
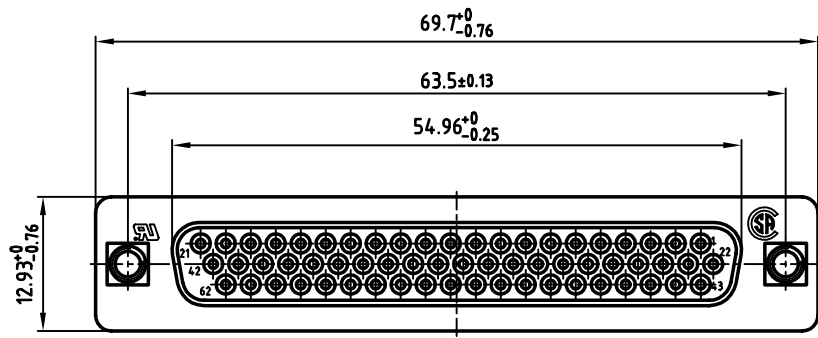


6 5 4 3 2 1 used for: D-SUB HD FILTER

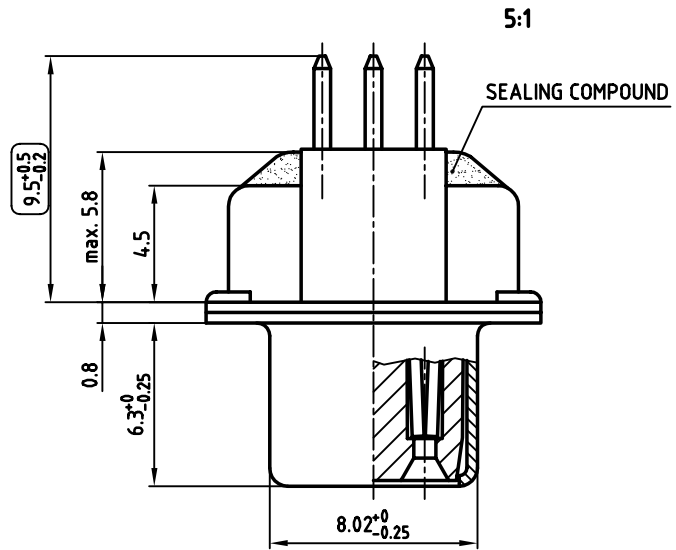

- NOTES:**
- 1. METALSHELLS: STEEL; min. 320µ" TIN
  - 2. INSULATORS: PBT GF UL 94 V-0, BLACK
  - 3. CONTACTS: COPPER ALLOY  
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
  - 4. THREADED REAR SPACER: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
  - 5. SLEEVE: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
  - 6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V11H6B
  - 7. CAPACITANCE: SEE TABLE
  - 8. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
  - 9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
  - 10. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
  - 11. = CHECK DIMENSION

| CAPACITANCE | PART NO.   |
|-------------|------------|
| 180pF ±20%  | 242A27530X |
| 370pF ±20%  | 242A18250X |
| 830pF ±20%  | 242A18290X |

|                                                          |        |
|----------------------------------------------------------|--------|
| APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL |        |
| CUSTOMER APPROVAL DATE:                                  |        |
| NAME:                                                    | TITLE: |
| COMPANY NAME:                                            |        |
| APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL |        |

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.  
OWNERSHIP AND COPYRIGHT OF CONEC GmbH  
DO NOT ALTER CAD DRAWING BY HAND

|            |             |                      |                                                                                   |           |  |
|------------|-------------|----------------------|-----------------------------------------------------------------------------------|-----------|--|
| tolerance  |             |                      | scale: 2:1 (5:1)                                                                  |           |  |
| dim. in mm |             |                      | material: SEE NOTES                                                               |           |  |
| 2003       | date        | name                 | D-SUB HD FILTER FEMALE<br>62pos. SOLDER PIN STRAIGHT<br>with threaded rear spacer |           |  |
| drawn      | 15.09.      | Lehmenkühler         |                                                                                   |           |  |
| appd.      | 19.09.      | Mickenbecker         |                                                                                   |           |  |
| norm       | DIN 41652   |                      |                                                                                   |           |  |
| d-old      |             | dwg no: AutoCAD 2000 |                                                                                   |           |  |
|            |             | 24K1A436             |                                                                                   | DIN-A     |  |
|            |             | part no: SEE TABLE   |                                                                                   | 3 sh: 1/1 |  |
| rev.       | description | date                 | name                                                                              |           |  |