

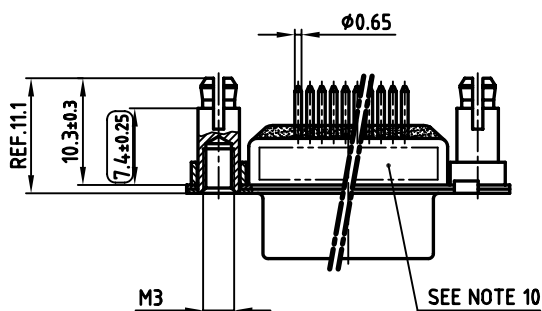
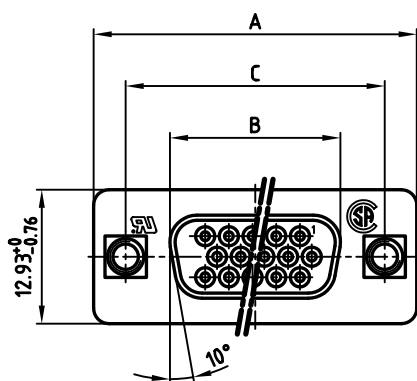


used for: D-SUB HD FILTER

POS.	A -0.76	B -0.25	C	Part NO.
15	31.19	16.46	25.00 ^{+0.12} _{-0.13}	242A20730X
26	39.52	24.79	33.30 ^{+0.15} _{-0.1}	242A20740X
44	53.42	38.50	47.04 ^{±0.13}	242A20750X
62	69.70	54.96	63.50 ^{±0.13}	242A20760X

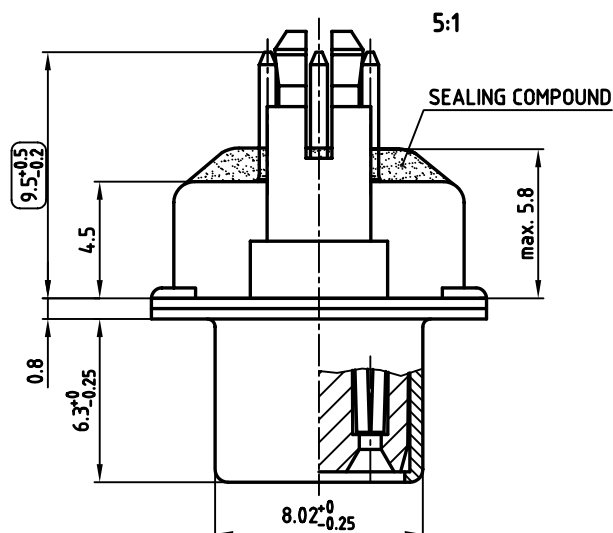

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. THREADED SPACER CLIP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. P.C.B. HOLE DRILLINGS ON SHEET 2
7. CAPACITANCE: 830pF ±20%
8. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
11. = CHECK DIMENSION

Directive 2002/95/EC
RoHS
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	
2006	date
drawn	15.02. Lehmenkühler
appd.	16.02. Mickenbecker
norm	DIN 41652
d-old	
CONEC®	

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB HD FILTER FEMALE	
15-62pos. SOLDER PIN STRAIGHT	
with threaded spacer clip	
dwg no:	AutoCAD 2004 DIN-A
24K1A769	
part no:	SEE TABLE

