

4



3

2

1

used for: D-SUB HD FILTER

POS.	A -0.76	B -0.25	C $+0.12$ -0.13	Part NO.
15	31.19	16.46	25.00	242A20770X
26	39.52	24.79	33.30 $+0.15$ -0.1	242A20780X

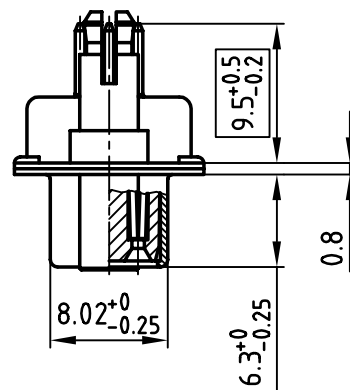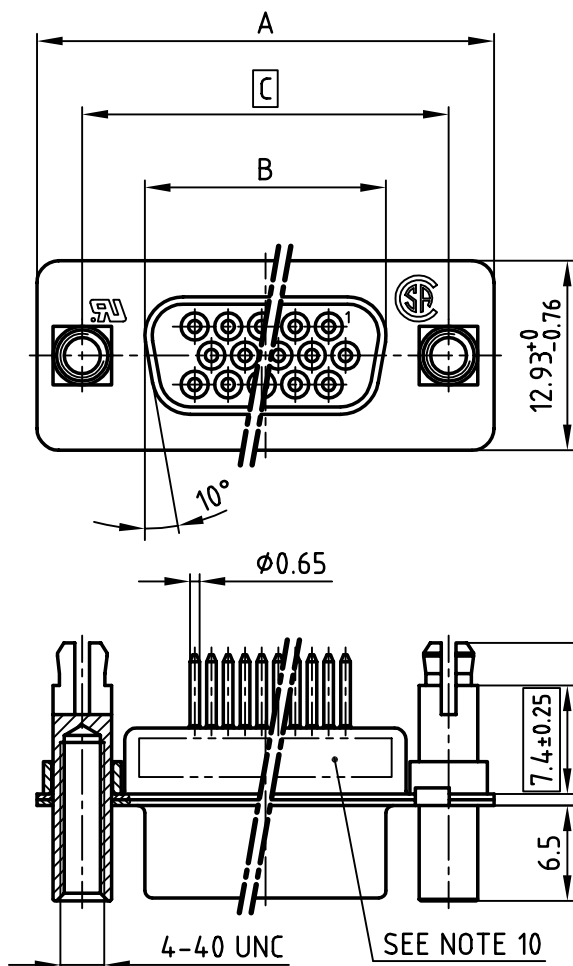

NOTES:

- METALSHELLS: STEEL; min. 320 μ " TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: min. 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
- THREADED LOCK: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- COLLAR: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- CAPACITANCE: 370pF $\pm 20\%$
- DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
- P.C.B. HOLE DRILLINGS SEE SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
- = CRITICAL DIMENSION

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

tolerance					
2002	date	name			
drawn	06.09,	Parei			
appd.	06.09.	Mickenbecker			
norm	DIN 41652				
d-old					
rev.	description	date	name		

CONEC[®]



scale: 2:1
material: SEE NOTES

title:
D-SUB HD FILTER FEMALE
15+26pos. SOLDER PIN STRAIGHT
with threaded lock and spacer clip

dwg no: AutoCAD 2000
24K1A315
part no: SEE TABLE

DIN-A
4
sh:1/2

4

3

2

1


4

3


2

1

used for: D-SUB HD FILTER

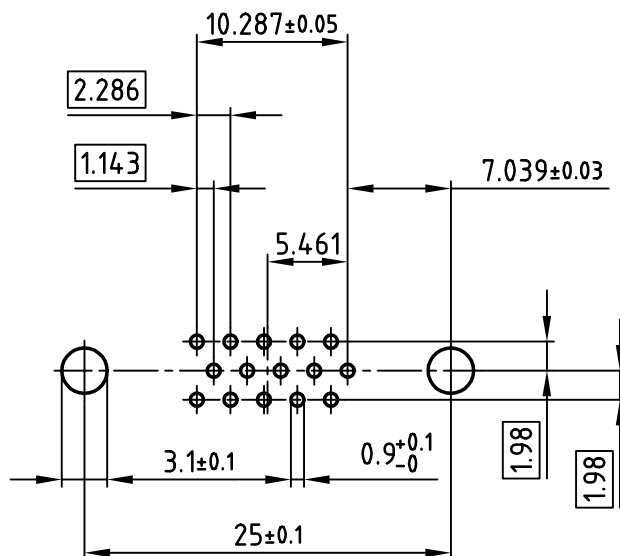

15pos.

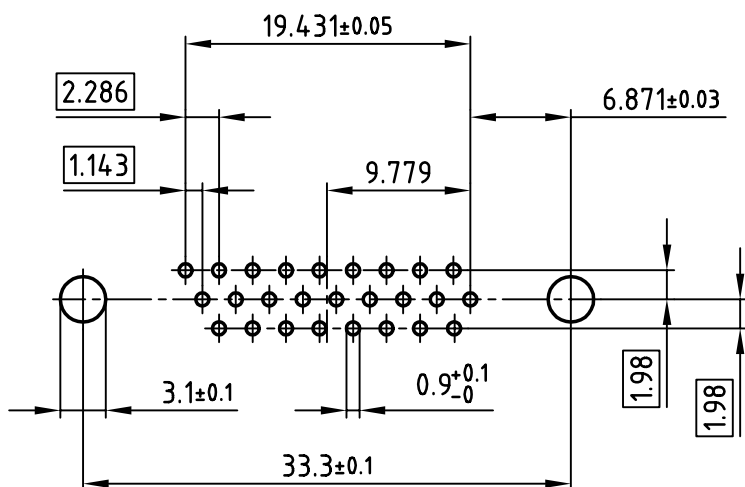

26pos.

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance



scale: 2:1
material: SEE SHEET 1

title:
P.C.B. HOLE DRILLINGS
D-SUB HD FILTER FEMALE 15+26pos.
with threaded lock and spacer clip

dwg no: AutoCAD 2000
24K1A315
part no: SEE SHEET 1

DIN-A
4
sh:2/2

CONEC®

4

3

2

1