
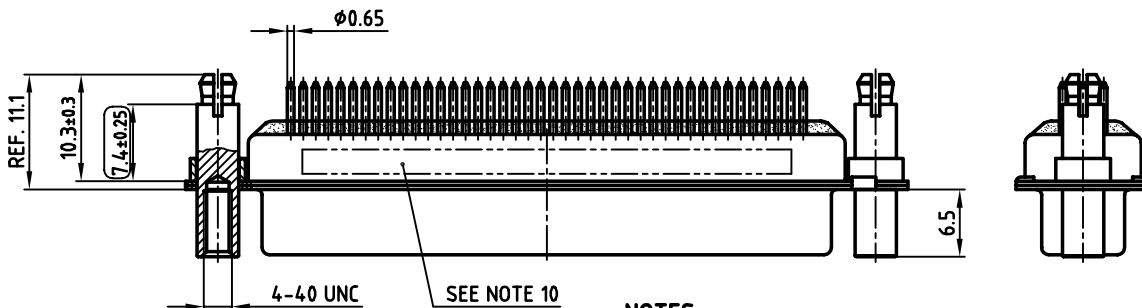
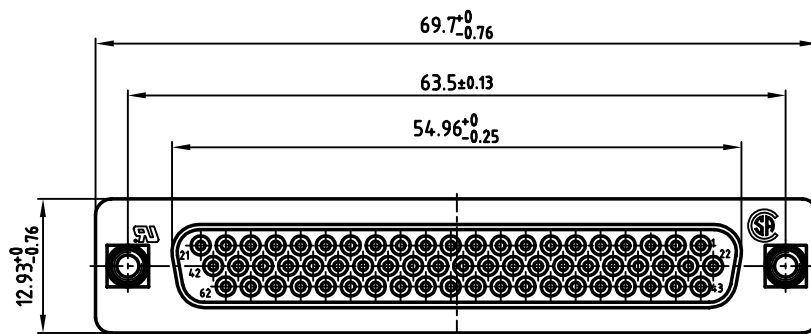


used for: D-SUB HD FILTER

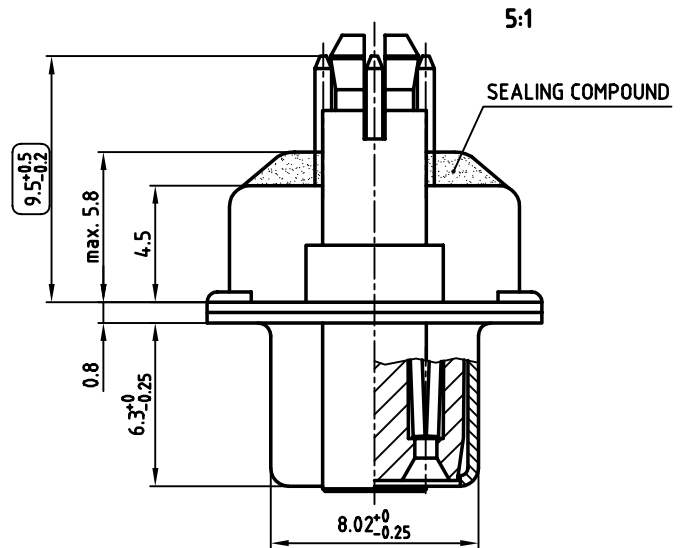

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. THREADED LOCK/SPACER CLIP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1IH6B
7. CAPACITANCE: SEE TABLE
8. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
11. = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF ±20%	242A27810X
370pF ±20%	242A20800X
830pF ±20%	242A20840X

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	dim. in mm
2003	date
drawn	16.09.
appd.	19.09.
norm	DIN 41652
d-old	
CONEC®	

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB HD FILTER FEMALE	
62pos. SOLDER PIN STRAIGHT	
with threaded lock and spacer clip	
dwg no:	AutoCAD 2000
24K1A440	
part no:	SEE TABLE
DIN-A	
3	
sh: 1/1	