
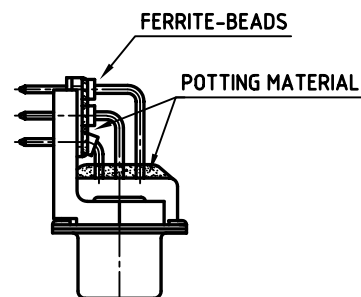
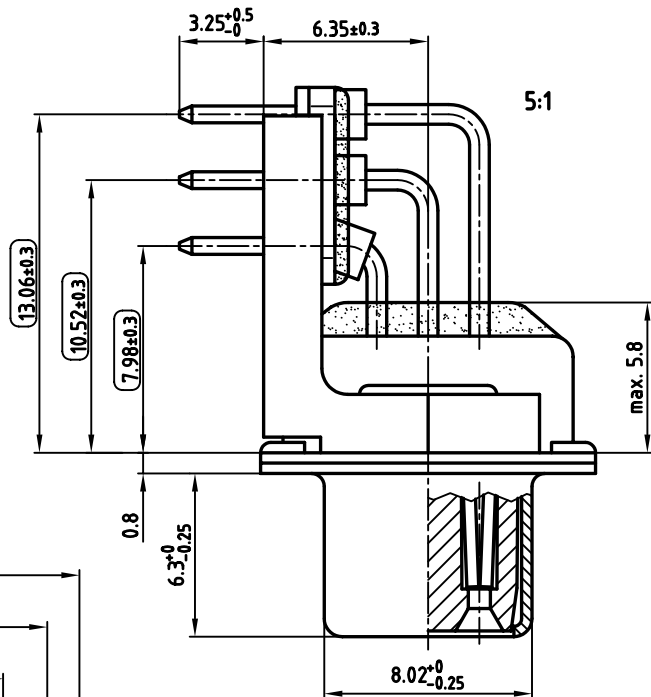



NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. METAL BRACKET: STEEL; min. 320µ" TIN over 80µ" NICKEL
5. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. FIXING-PLATE: PBT GF UL 94 V-0, BLACK
7. CAPACITANCE: SEE TABLE
8. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
11. = CHECK DIMENSION

CAPACITANCE	CAPACITANCE	CAPACITANCE
180pF ±20%	370pF ±20%	830pF ±20%
242A26610X	242A25650X	242A25690X

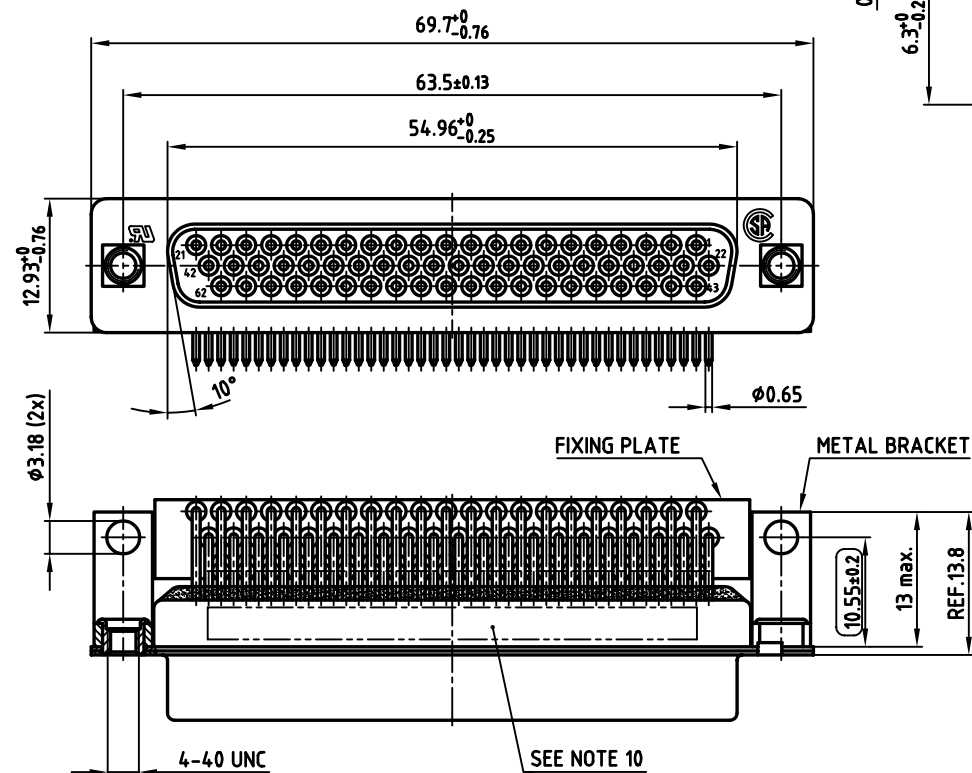

P.C.B. HOLE PATTERN

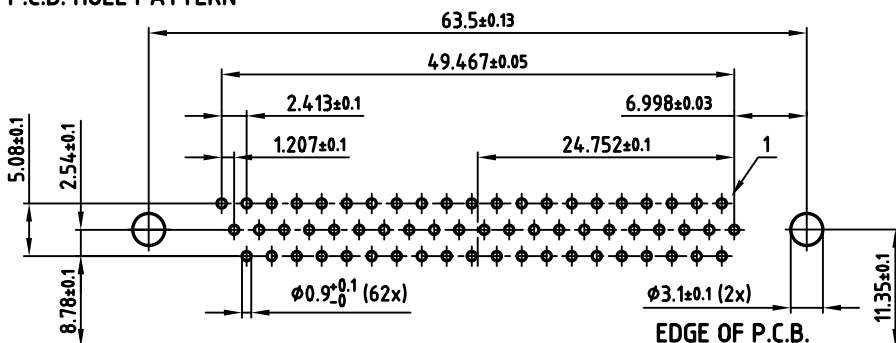

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
2005	date	name	
drawn	09.02.	Lehmenkühler	
appd.	09.02.	Mickenbecker	
norm			
d-old			

tolerance	dim. in mm
scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB HD FILTER FEMALE 90° 62pos. 0.350inch with metal bracket and threaded insert	
dwg no:	AutoCAD 2004 DIN-A
24K1A605	3 sh: 1/1
part no:	SEE TABLE

