
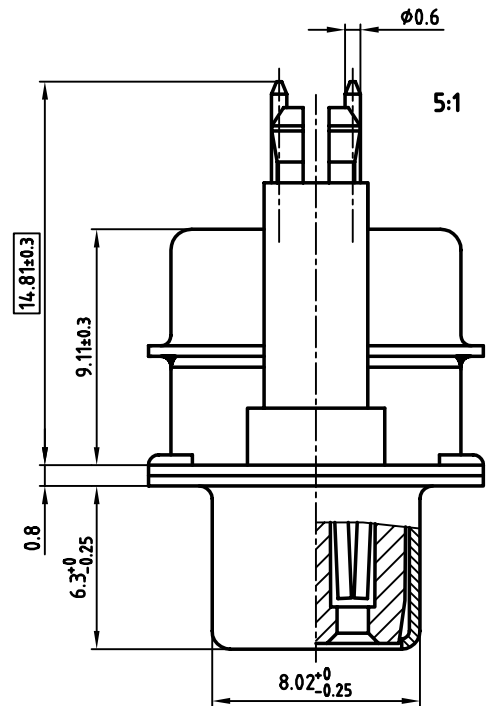

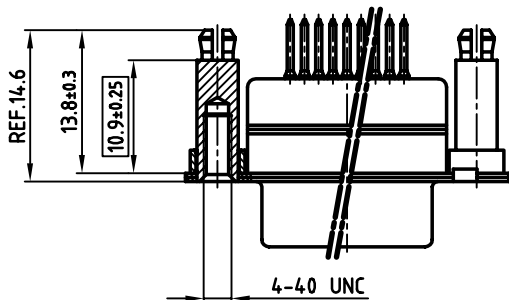


No. of pos.	A -0.76	B -0.25	C	Part No.
9	31.19	16.46	25.00 ^{+0.12} _{-0.13}	242A26260X
15	39.52	24.79	33.30 ^{+0.15} _{-0.1}	242A26270X
25	53.42	38.50	47.04 ^{+0.13}	242A26280X
37	69.70	54.96	63.50 ^{+0.13}	242A26290X

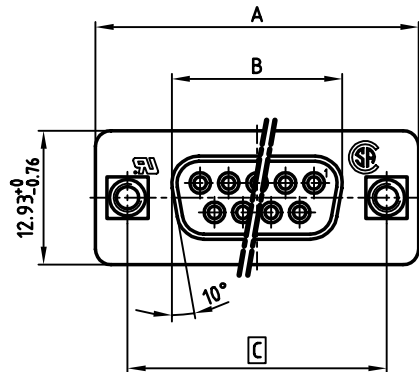

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
- PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
- THREADED SPACER CLIP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
- CAPACITANCE: 2 x 180pF $\pm 20\%$
- DIELECTRIC WITHSTANDING VOLTAGE: 424V DC
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: **PART-NO. CONEC Y/WW**
- = CRITICAL DIMENSION

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

CONEC CORPORATION BRAMPTON, ONTARIO			
rev.	description	date	name

tolerance		
2002	date	name
drawn	08.04.	Parei
appd.	08.04.	E. Mickenbecker
norm	DIN 41652	
d-old		
		

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB Π FILTER FEMALE 9-37pos. SOLDER PIN STRAIGHT with threaded spacer clip	
dwg no:	AutoCAD 2000	DIN-A
	24K1A239	3
		sh: 1/1
part no:	SEE TABLE	