



used for: D-SUB π FILTER

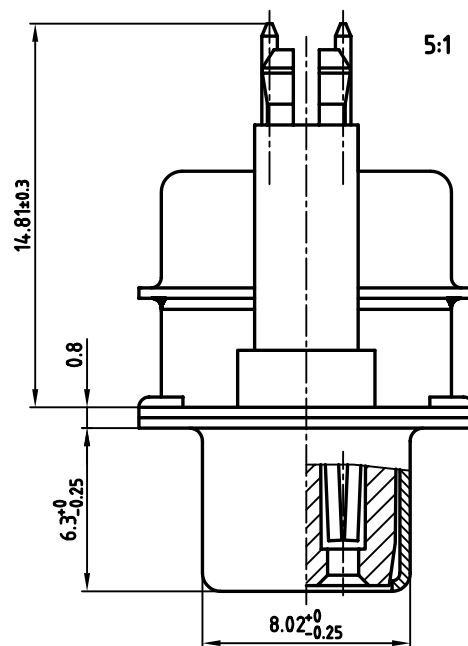

1. RoHS COMPLIANT
2. SUITABLE FOR WAVE SOLDERING
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
6. THREADED SPACER CLIP: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
7. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
8. P.C.B. HOLE DRILLINGS ON SHEET 2
9. CAPACITANCE: $2 \times 1300\text{pF} \pm 20\%$
10. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
11. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
12. CONNECTOR IS PART MARKED:

PART-NO.	CONEC	ABC
----------	-------	-----

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL


THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm		scale: 2:1 (5:1)			
								material:		SEE NOTES	
				2007	date	name		title: D-SUB π FILTER FEMALE 9-37pos. SOLDER PIN STRAIGHT with threaded spacer clip			
				drawn	22.03.	Lehmenkühler					
				appd.	22.03.	Mickenbecker					
				norm	DIN 41652						
				d-old							
								dwg no:		AutoCAD 2006	DIN-A
a	Origin							24K1A984		3	sh:1/2
rev.		description	date					name	part no:		




used for: D-SUB 15 FILTER


9pos.

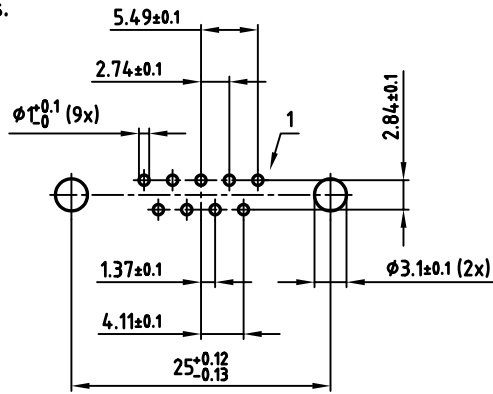


25pos.

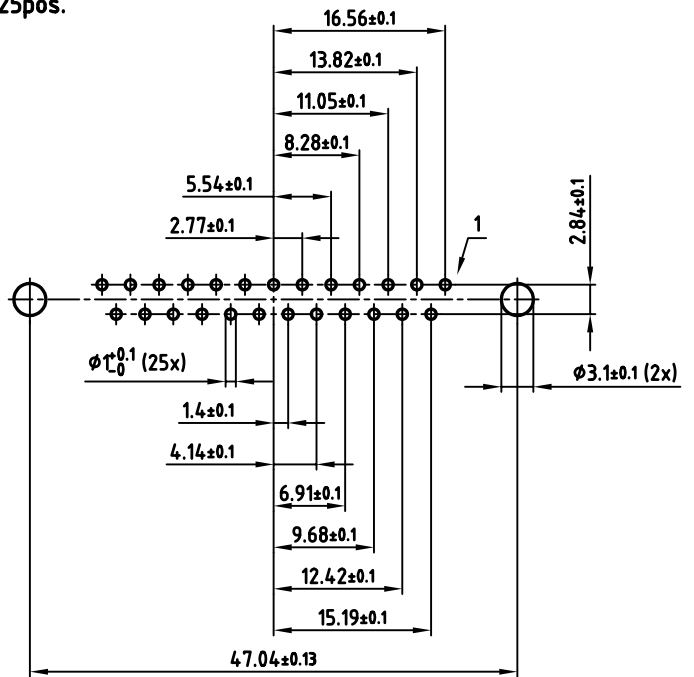

15pos.

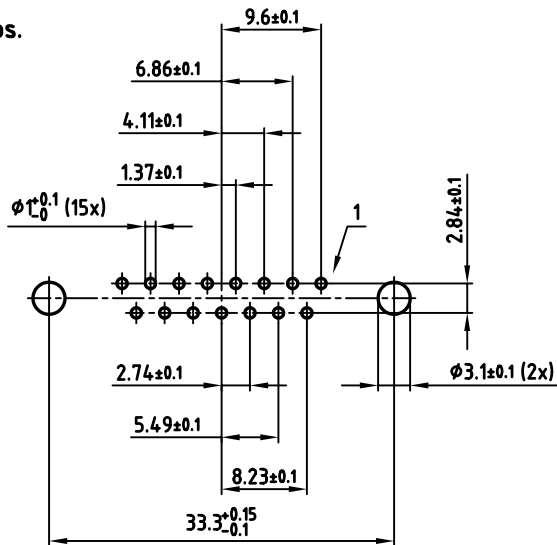

37pos.

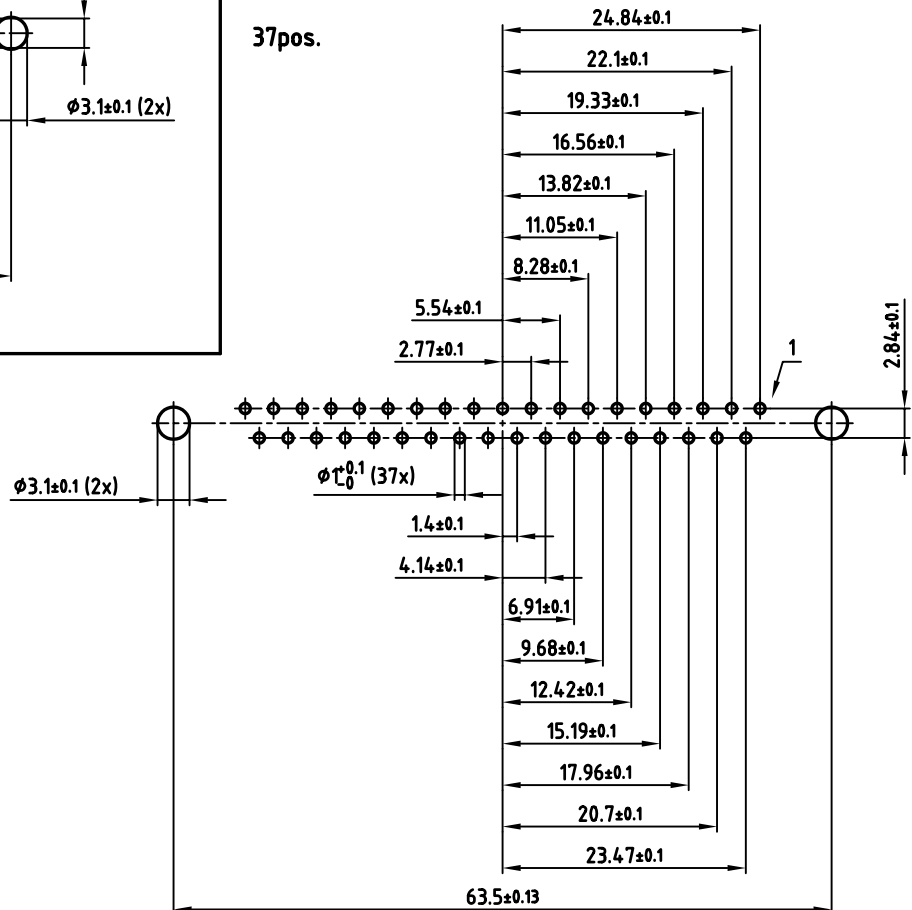

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	dim. in mm
2007	date
drawn	22.03. Lehmenkühler
appd.	22.03. Mickenbecker
norm	DIN 41652
d-old	

scale:	2:1
material:	SEE SHEET 1
title:	P.C.B. HOLE DRILLINGS D-SUB 15 FILTER FEMALE 9-37pos. SOLDER PIN with threaded spacer clip
dwg no:	AutoCAD 2006 DIN-A
	24K1A984 3 sh:2/2
part no:	SEE SHEET 1

CONEC