
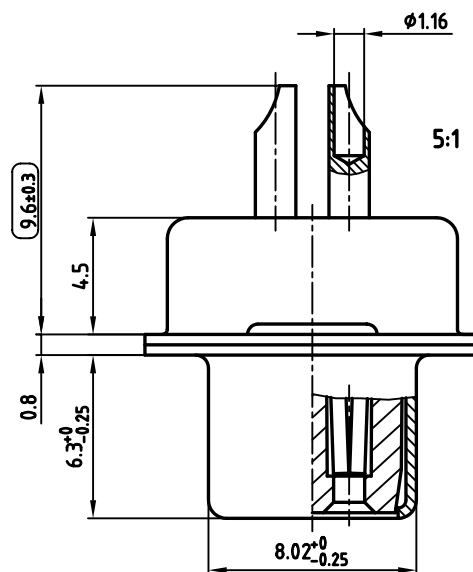

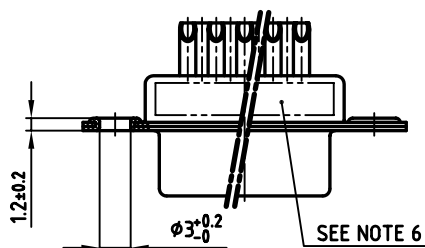


used for: D-SUB FILTER

POS.	A -0.76	B -0.25	C	Part NO.
9	31.19	16.46	25.00 ± 0.12 -0.13	242A26860X
15	39.52	24.79	33.30 ± 0.15 -0.1	242A26870X
25	53.42	38.50	47.04 ± 0.13	242A26880X
37	69.70	54.96	63.50 ± 0.13	242A26890X

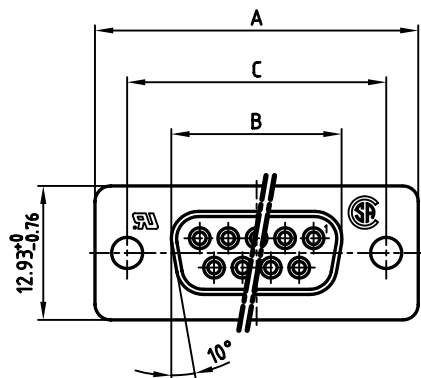

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- CAPACITANCE: 1300pF $\pm 20\%$
- DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
-  = CHECK DIMENSION

Directive 2002/95/EC
RoHS
Compliant

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	date	name
2006	03.02.	Lehmenkühler
drawn	03.02.	Mickenbecker
appd.		
norm		DIN 41652
d-old		

scale:	2:1 (5:1)
material:	SEE NOTES
title: D-SUB FILTER FEMALE 9-37pos. SOLDER CUP	
dwg no:	AutoCAD 2004 DIN-A
24K1A757	
part no:	SEE TABLE