
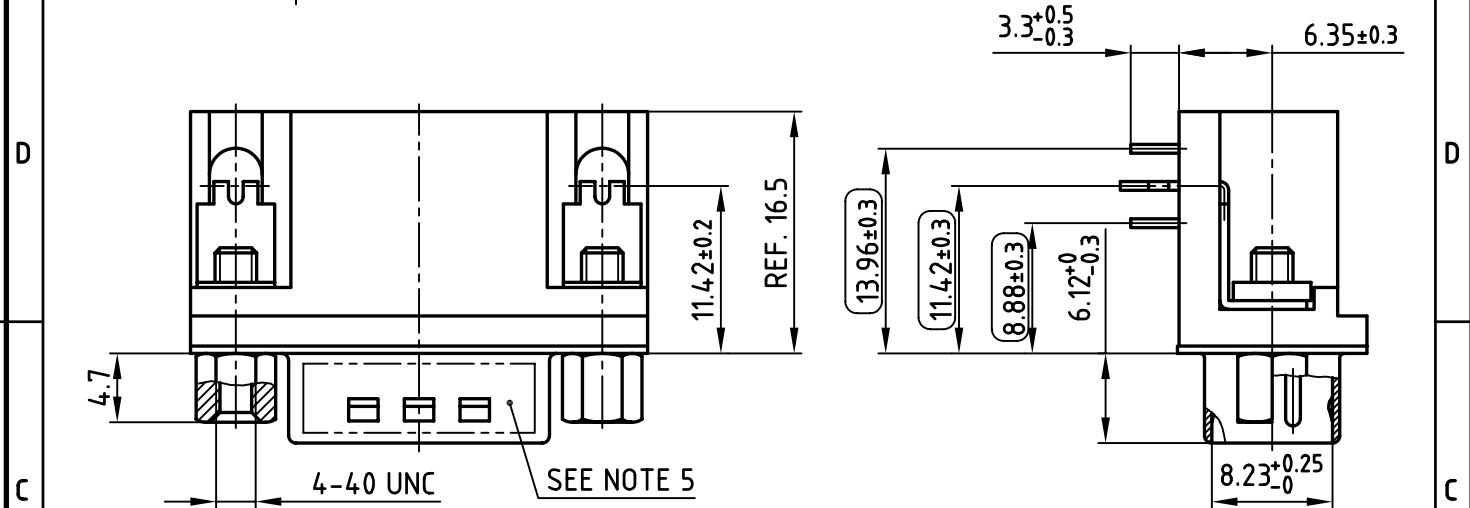


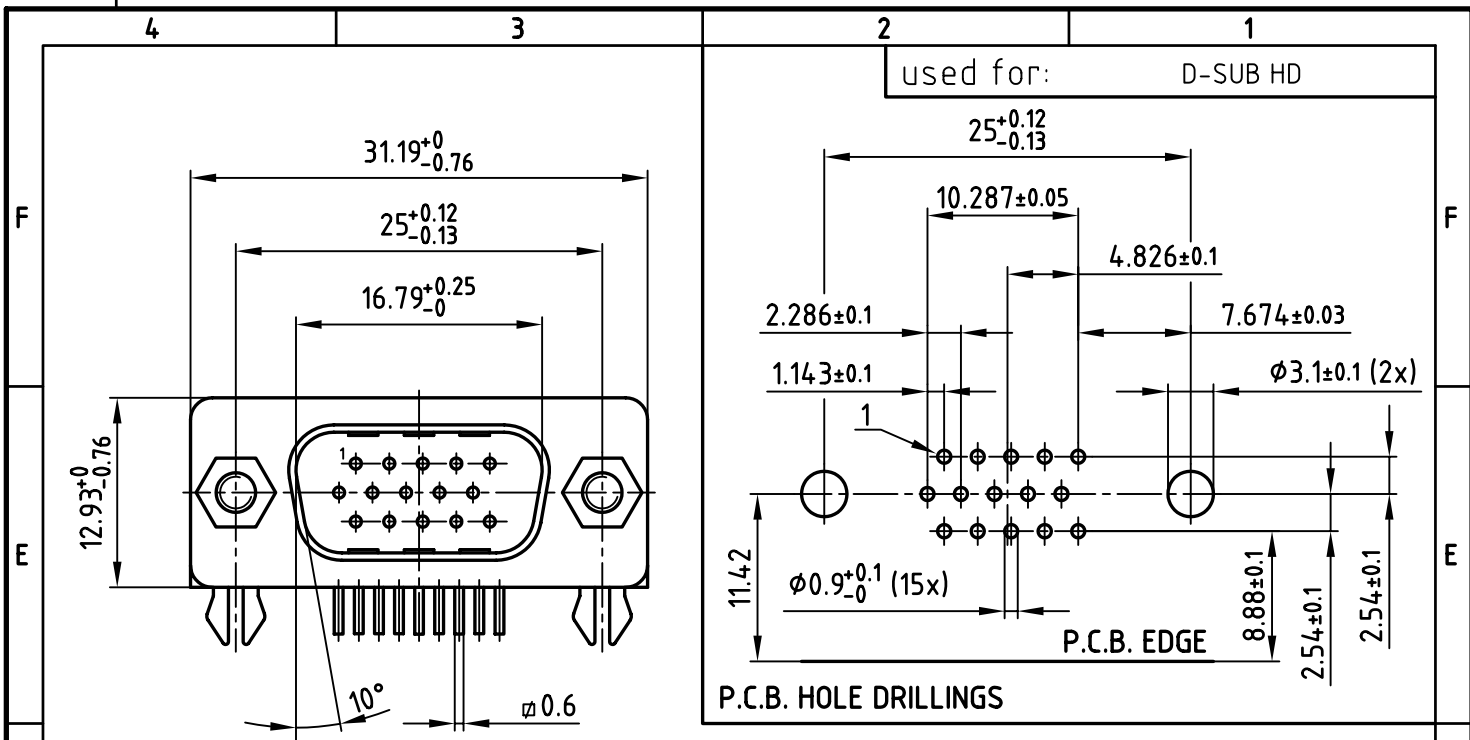

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. PCB-CLIP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
5. CONNECTOR IS PART MARKED: 301A10869X CONEC ABC
6. = CHECK DIMENSION

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance			scale: 2:1		
							material: SEE NOTES		
							title: D-SUB HD MALE 90° 15pos. pin angled 0.350", stamped contacts with threaded lock and clip		
							dwg no: AutoCAD 2004 16K2A703		
rev.				description		date		name	
2005				date		name		DIN-A	
drawn				20.12.		Lehmenkühler		4	
appd.				20.12.		Mickenbecker		sh: 1/1	
norm				DIN 41652					
d-old									
				part no:		301A10869X			