

4

3

2




1

used for:

D-SUB

NOTES:

1. METALSHELLS: STEEL; TIN PLATED
2. INSULATORS: PA UL 94 V-0; BLACK
3. PLATING: min. 8µ" HARD GOLD OVER
min. 50µ" NICKEL
4. PCB-SNAP: COPPER ALLOY; TIN PLATED
PCB-HOLE: $\varnothing 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
5. PCB-BOARD DRILLINGS ON DRAWING No.16K11IUA
6. = CRITICAL DIMENSION: SPC

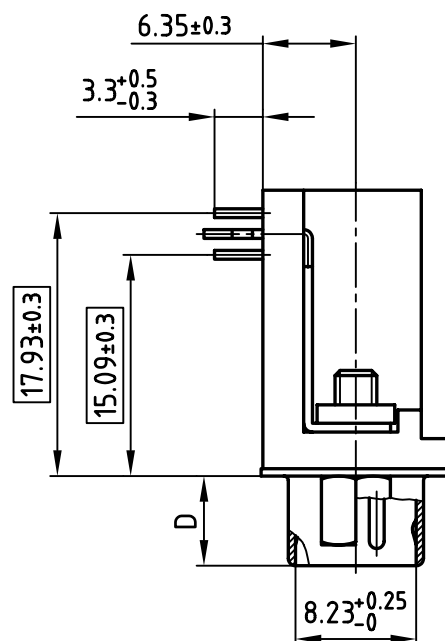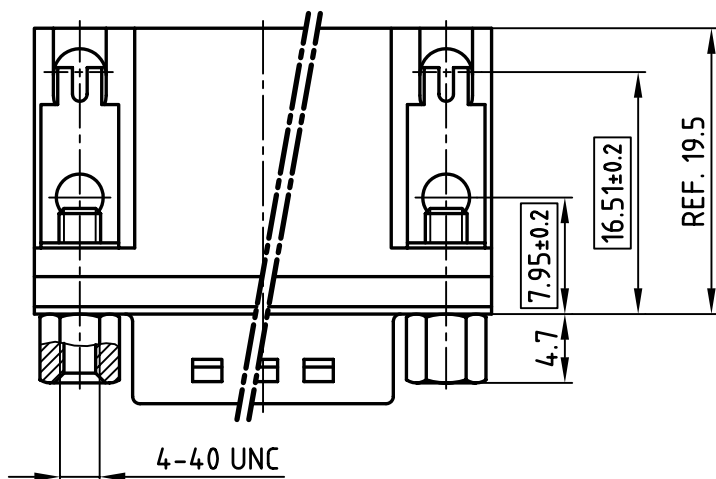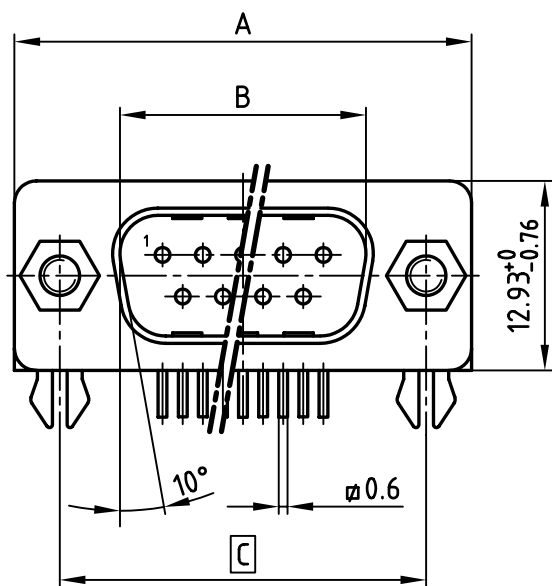

POS.	A -0.76	B +0.25	C	D -0.3	PART-NO.
9	31.19	16.79	25.00 $\begin{smallmatrix} +0.12 \\ -0.13 \end{smallmatrix}$	6.12	301A10979X
15	39.52	25.12	33.30 $\begin{smallmatrix} +0.15 \\ -0.1 \end{smallmatrix}$	6.12	301A10989X
25	53.42	38.84	47.04 ± 0.13	5.99	301A10999X
37	69.70	55.30	63.50 ± 0.13	5.99	301A11009X

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance



scale:

2:1

material:

SEE NOTES

title:

D-SUB MALE 90°

0.590inch 9-37pos.

with threaded insert , Hex bolts and clip

dwg no:

CAD/ REL.14

DIN-A

16K1IKQA

4

sh:1/1

product no:

SEE TABLE

CONEC®

4

3

2

1