

4

3



2

1


used for:

D-SUB

POS.	A -0.76	B $+0.25$	C	D -0.3	Part NO.
9	31.19	16.79	25.00 ± 0.12 -0.13	6.12	301A11029X
15	39.52	25.12	33.30 ± 0.15 -0.1	6.12	301A11039X
25	53.42	38.84	47.04 ± 0.13	5.99	301A11049X
37	69.70	55.30	63.50 ± 0.13	5.99	301A11059X

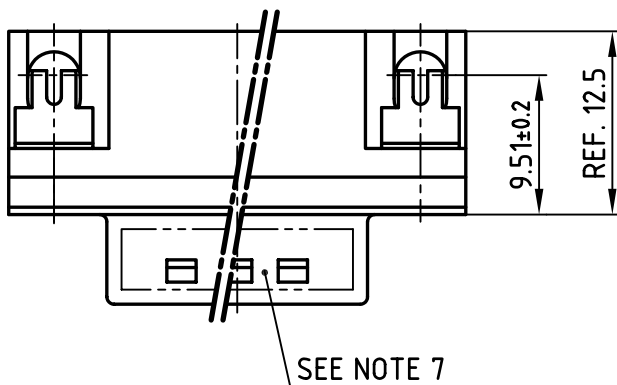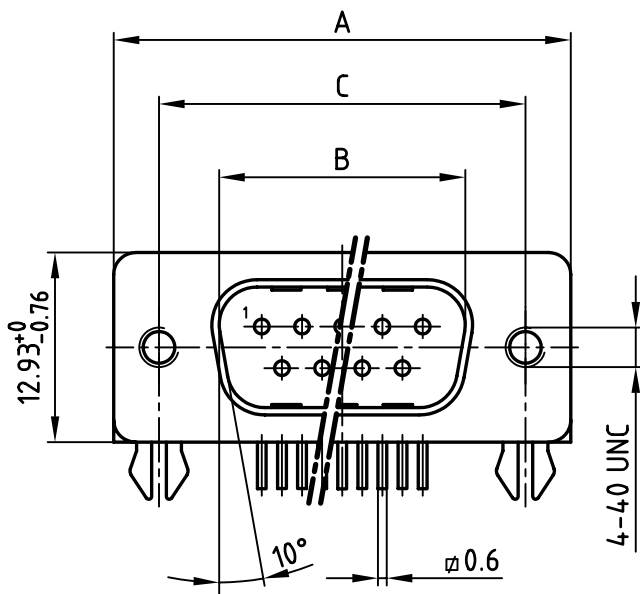

SEE NOTE 7

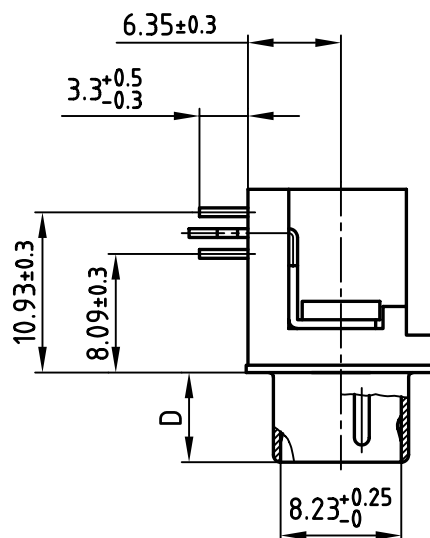

Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PA UL 94 V-0, BLACK
3. PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. PCB-SNAP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
5. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
6. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
7. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		
				2002	date	
				drawn	28.06.	Parei
				appd.	28.06.	E. Mickenbecker
				norm	DIN 41652	
				d-old		
rev.	description	date	name			

material:		SEE NOTES	
title:		D-SUB MALE 90° 9-37pos. pin angled 0.318", stamped contacts with threaded insert and clip	
dwg no:		AutoCAD 2000	DIN-A
16K1A702		4	
part no:		SEE TABLE	
		sh: 1/1	

4

3

2

1