

4

3




2

1

used for:

D-SUB HD

Part NO.	POS.	A -0.76	B -0.25	C
302A10129X	15	31.19	16.46	25.00 $+0.12$ -0.13
302A10139X	26	39.52	24.79	33.30 $+0.15$ -0.1
302A10149X	44	53.42	38.50	47.04 ± 0.13
302A10159X	62	69.70	54.96	63.50 ± 0.13

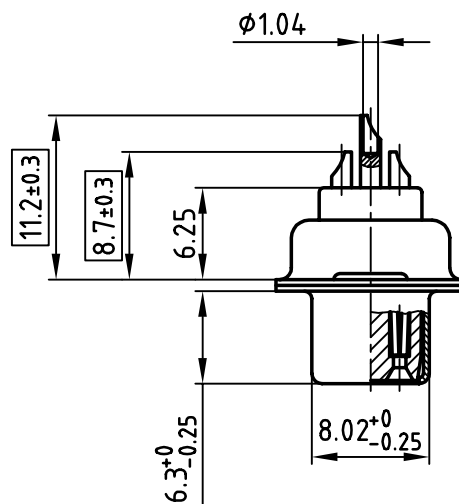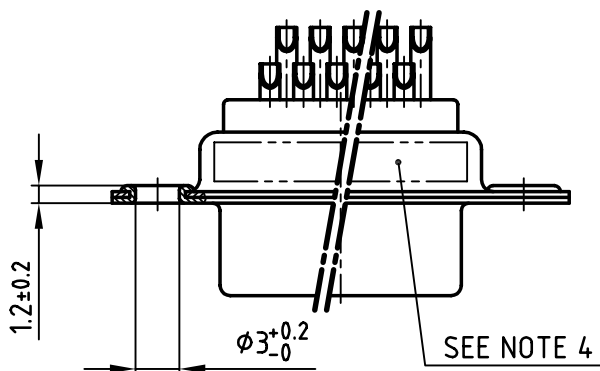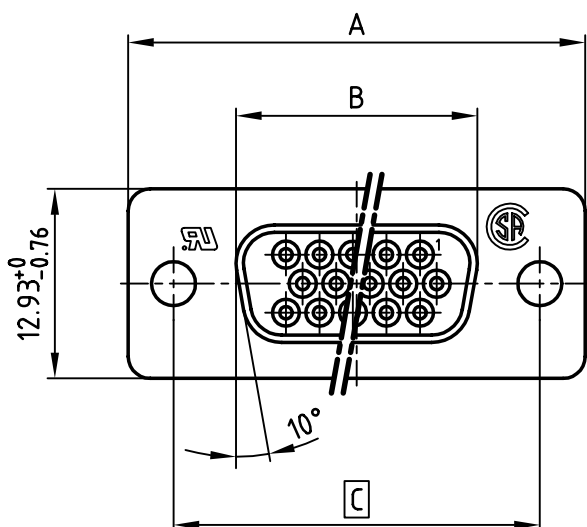

Directive 2002/95/EC
„RoHS“
Compliant

NOTES:


- METALSHELLS: STEEL; min. 320μ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
SOLDER CUP ACCEPTS CABLE AWG 22
- CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
- = CRITICAL DIMENSION

APPROVAL * FREIGABE * DEBLOCKAGE * AUTOR/ZACIEN * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCKAGE * AUTOR/ZACIEN * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance



scale:

2:1

material:

SEE NOTES

title:

D-SUB HD FEMALE
15-62pos. SOLDER CUP

dwg no:

AutoCAD 2000

DIN-A

16K1A782

4

sh: 1/1

part no:

SEE TABLE

CONEC[®]

4

3

2

1