

4


3

2



1

used for:

D-SUB

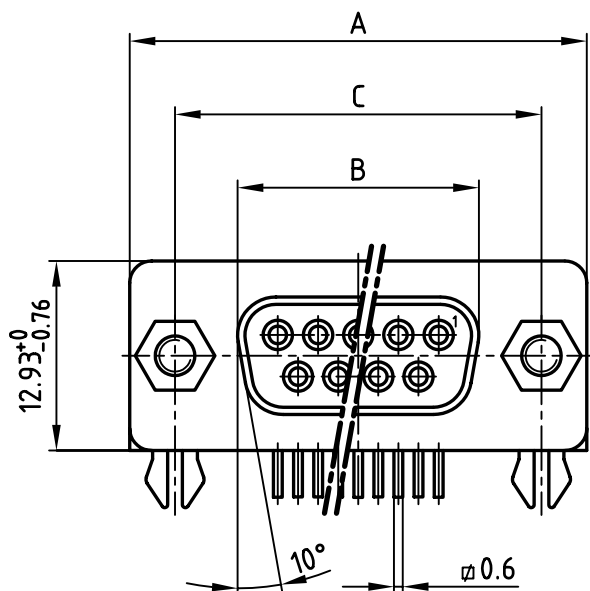

POS.	A -0.76	B -0.25	C	Part NO.
9	31.19	16.46	25.00 $^{+0.12}_{-0.13}$	302A10779X
15	39.52	24.79	33.30 $^{+0.15}_{-0.1}$	302A10789X
25	53.42	38.50	47.04 ± 0.13	302A10799X
37	69.70	54.96	63.50 ± 0.13	302A10809X

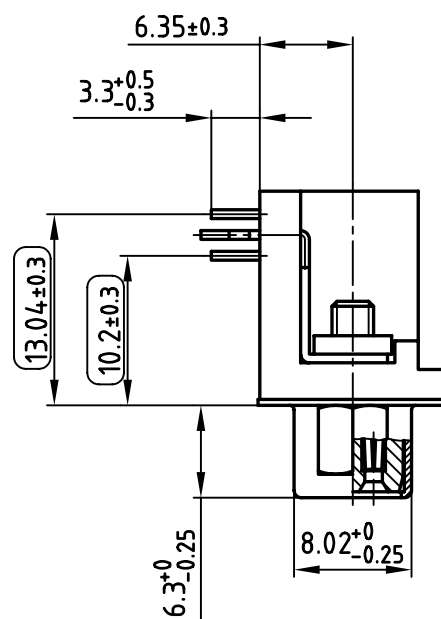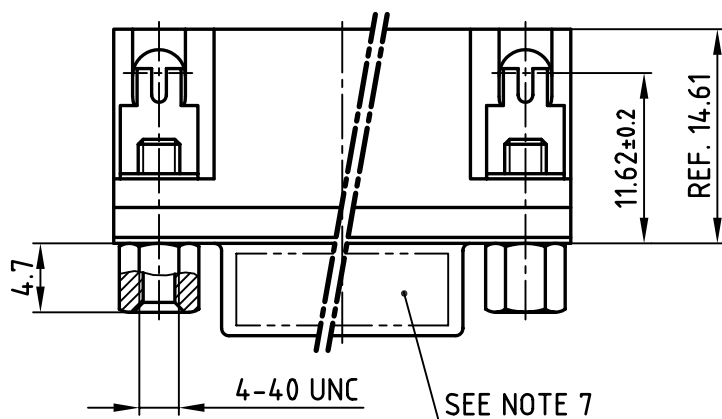

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- PCB-SNAP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- = CHECK DIMENSION

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

			tolerance		dim. in mm
2004	date	name			
drawn	04.05.	Schmidt			
appd.	04.05.	Mickenbecker			
norm					
d-old					
rev.	description	date			

CONEC[®]

scale:	2:1	
material:	SEE NOTES	
title:	D-SUB FEMALE 90° 9-37pos. stamped contacts with threaded lock and clip	
dwg no:	AutoCAD 2004	DIN-A
	16K1A1150	4
		sh: 1/1
part no:	SEE TABLE	

4

3

2

1