

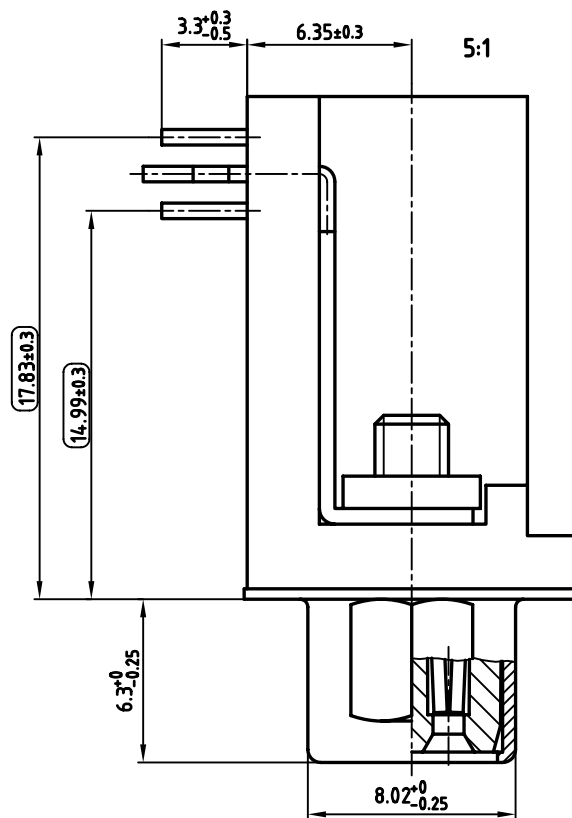
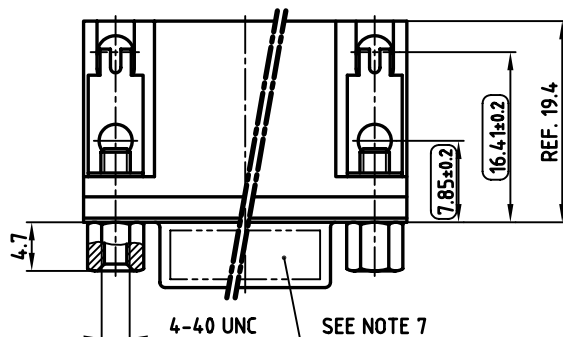


used for: D-SUB

POS.	A -0.76	B -0.25	C $\begin{smallmatrix} +0.12 \\ -0.13 \end{smallmatrix}$	Part-NO.
9	31.19	16.46	25.00	302A11289X
15	39.52	24.79	33.30 $\begin{smallmatrix} +0.15 \\ -0.1 \end{smallmatrix}$	302A11299X
25	53.42	38.50	47.04 ± 0.13	302A11309X
37	69.70	54.96	63.50 ± 0.13	302A11319X

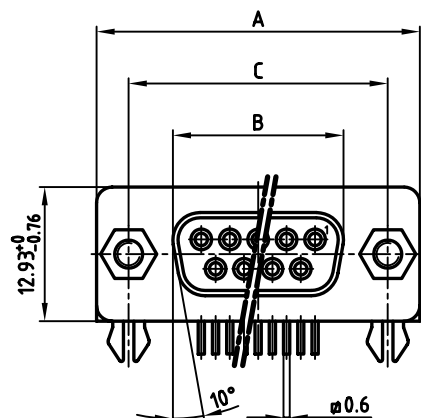

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- PCB-SNAP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K111UA
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- = CHECK DIMENSION

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		dim. in mm
2005	date	
drawn	17.03.	name
appd.	17.03.	Mickenbecker
norm		
d-old		
CONEC [®]		

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB FEMALE 90° 9-37pos. STAMPED CONTACTS with threaded lock and clip	
dwg no:	AutoCAD 2004 DIN-A
16K1A1351	
part no:	SEE TABLE
sh: 1/1	