

4

3

2




1

used for:

D-SUB

NOTES:

1. METALSHELLS: STEEL; TIN PLATED
2. INSULATORS: PA UL 94 V-0; BLACK
3. PLATING: min. 8µ" HARD GOLD OVER
min. 50µ" NICKEL
4. PCB-SNAP: COPPER ALLOY; TIN PLATED
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
5. PCB-BOARD DRILLINGS ON DRAWING No.16K11IUA
6. CONNECTOR IS PART MARKED:
PART-NO. CONEC Y/WW
7. = CRITICAL DIMENSION

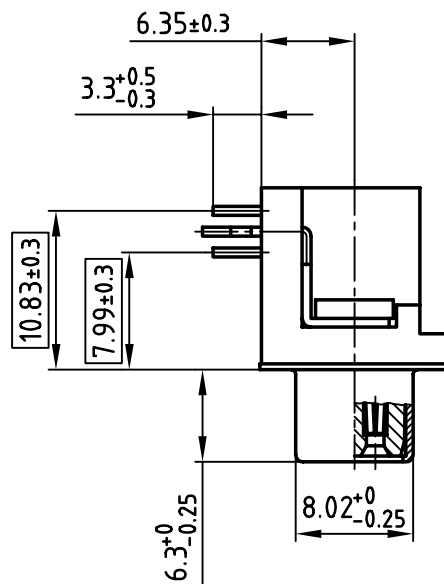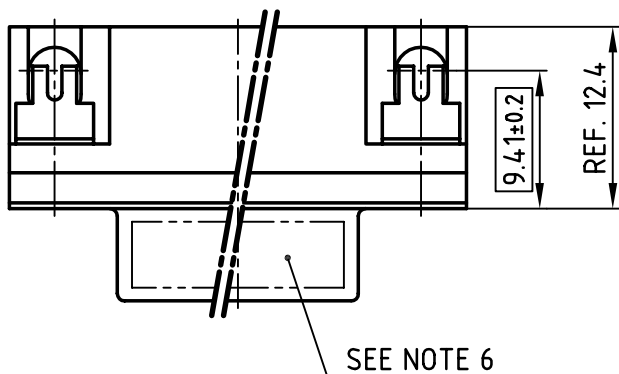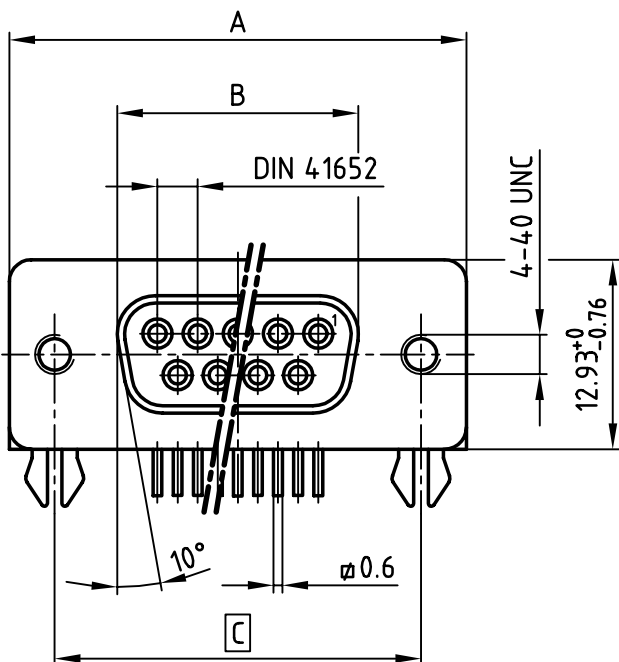

POS.	A -0.76	B -0.25	C	PART-NO.
9	31.19	16.46	25.00 $^{+0.12}_{-0.13}$	302A11339X
15	39.52	24.79	33.30 $^{+0.15}_{-0.1}$	302A11349X
25	53.42	38.50	47.04 ± 0.13	302A11359X
37	69.70	54.96	63.50 ± 0.13	302A11369X

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2002	date	name	
				drawn	24.04.	Parei	
				appd.	24.04.	E. Mickenbecker	
				norm	DIN 41652		
				d-old			
rev.	description	date	name				

4

3

2

1

A