
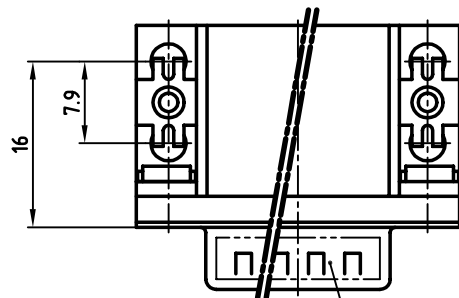
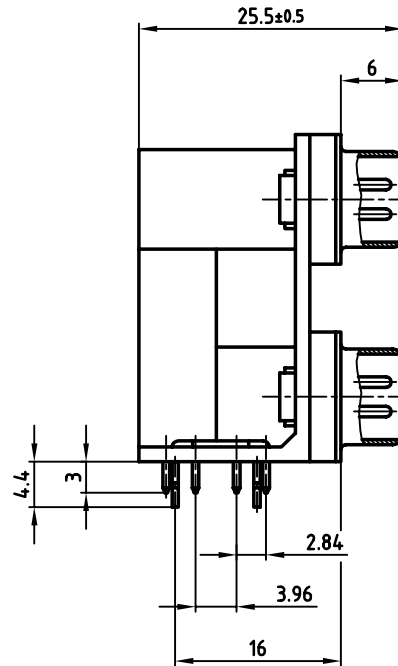


used for:	D-SUB DUAL-PORT
-----------	-----------------

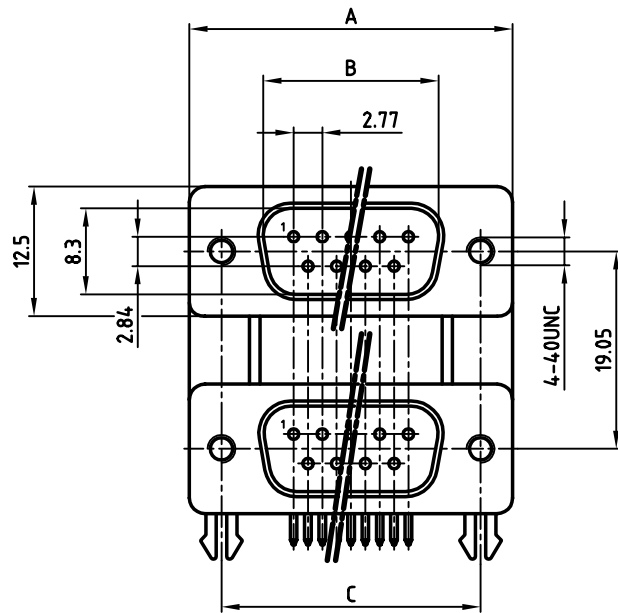


SEE NOTE 5

No. of pos.	A	B	C	Part-NO.
2x 9	30.80	16.92	25.00	DLS1PP5AN23X
2x15	39.20	25.25	33.30	DLS2PP5AN23X
2x25	53.10	38.96	47.10	DLS3PP5AN23X
2x37	69.40	55.42	63.50	DLS4PP5AN23X

NOTES:

1. METAL SHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
5. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
6. = CRITICAL DIMENSION

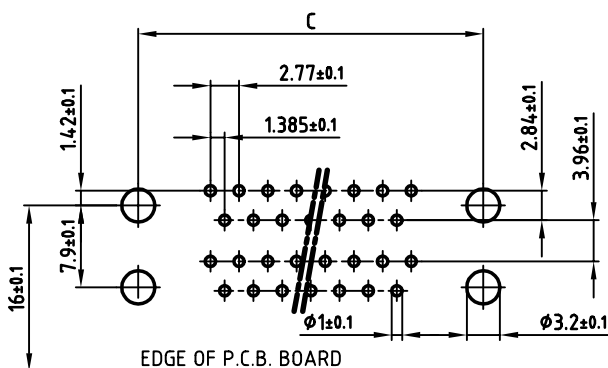

P.C.B. HOLE DRILLINGS

APPROVAL # FREGABE # DEBLOCAGE # AUTUR/ZACION # APPROVAL	APPROVAL # FREGABE # DEBLOCAGE # AUTUR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREGABE # DEBLOCAGE # AUTUR/ZACION # APPROVAL	APPROVAL # FREGABE # DEBLOCAGE # AUTUR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance	
				dim. in mm	
				2003	date
				name	
				drawn	12.03.
				Parei	
				appd.	12.03.
				Kühle	
				norm	
				d-old	
					
rev.	description	date	name		

tolerance



scale:	2:1
material:	SEE NOTES

title:	D-SUB DUAL-PORT
	MALE / MALE 2x9pos. - 2x37pos.
	with 4-40 insert

dwg no:	AutoCAD 2000	DIN-A
---------	--------------	-------

16K1A916

part no:	SEE TABLE
----------	-----------