
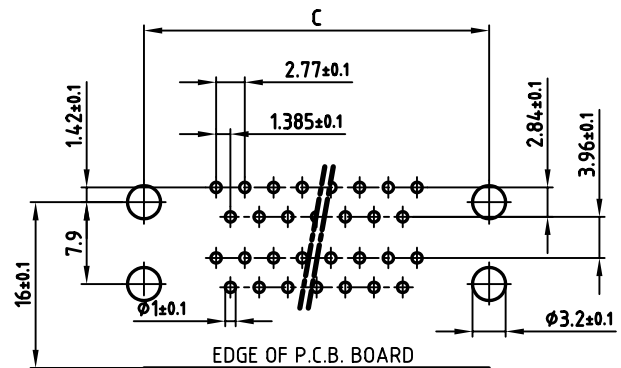
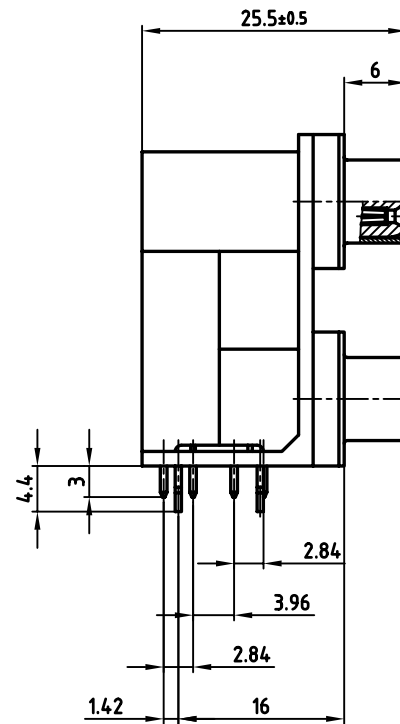


used for:	D-SUB DUAL-PORT
-----------	-----------------

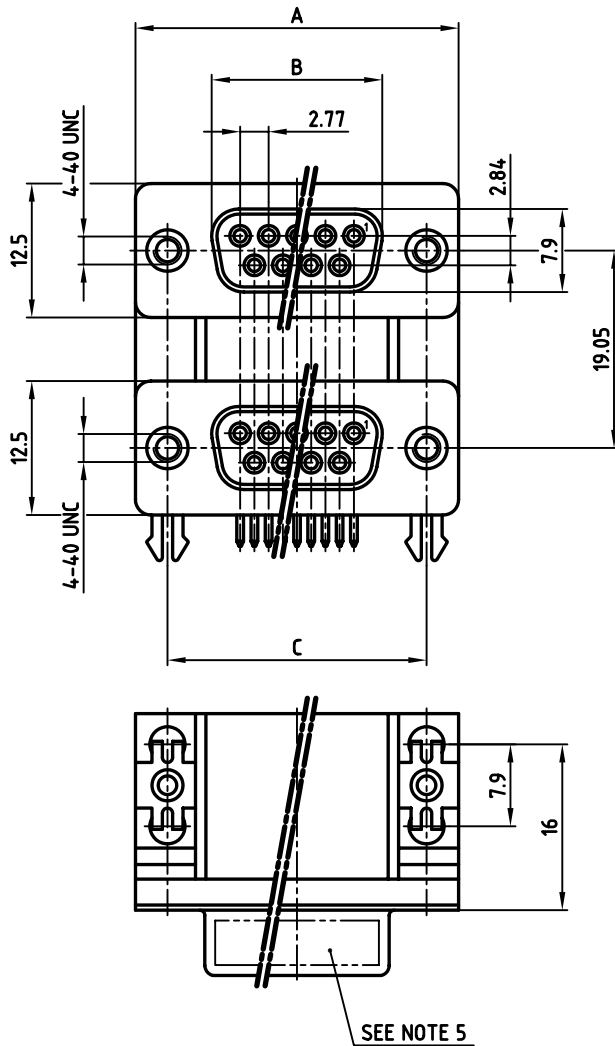

RECOMMENDED P.C.B. LAYOUT

NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT, RATED 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: - CONTACT AREA: 1μ"~30μ" SELECTIVE GOLD
- SOLDER TAILS AREA: 100μ" TIN / LEAD
- UNDERPLATE: 50μ" NICKEL
4. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
5. CONNECTOR IS PART MARKED:

PART-NO.	CONEC	ABC
----------	-------	-----

No. of pos.	A	B	C	Part No.
2x 9	30.80	16.30	25.00	DLS1SS5AN23X
2x15	39.20	24.60	33.30	DLS2SS5AN23X
2x25	53.10	38.30	47.10	DLS3SS5AN23X
2x37	69.40	54.80	63.50	DLS4SS5AN23X

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm	
				20004	date	name	
				drawn	11.10.	Schmidt	
				appd.	11.10.	Mickenbecker	
				norm			
				d-old			
							
rev.	description	date	name				

tolerance



scale:	2:1
material:	SEE NOTES

title:	D-SUB DUAL-PORT Female / Female 2x9pos. - 2x37pos. with 4-40 UNC inserts and clips
--------	---

dwg no:	AutoCAD 2004	DIN-A
---------	--------------	-------

16K1A1244

part no: SEE TABLE

DIN-A
3
sh: 1/1