



D-SUB STANDARD

Press-fit contact – Straight – Precision machined contacts

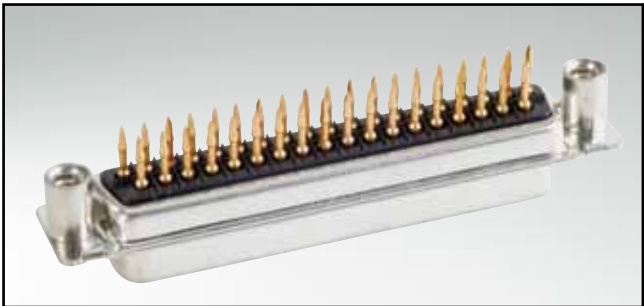


RoHS compliant – CSA listed, File No.: LR 115000-1 – UL listed, File No.: E202784

SOCKET CONNECTOR




No. of pos.	A -0.76	B -0.25	C
09	31.19	16.46	25.00 +0.12
15	39.52	24.79	33.30 +0.15 -0.10
25	53.42	38.50	47.04 +0.13
37	69.70	54.96	63.50 +0.13

9-37 pos.



50 pos.

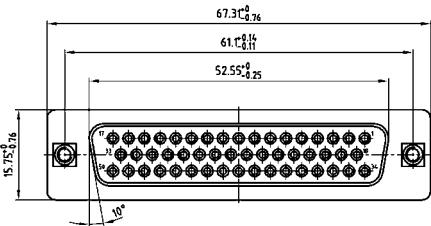


ORDER DATA

SOCKET CONNECTOR		
No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer	DSS 1XSFAA49 X
15	4-40 UNC Threaded rear spacer	DSS 2XSFAA49 X
25	4-40 UNC Threaded rear spacer	DSS 3XSFAA49 X
37	4-40 UNC Threaded rear spacer	DSS 4XSFAA49 X
50	4-40 UNC Threaded rear spacer	DSS 5XSFAA49 X
09	M3 Threaded rear spacer	DSS 1XSF5AA50 X
15	M3 Threaded rear spacer	DSS 2XSF5AA50 X
25	M3 Threaded rear spacer	DSS 3XSF5AA50 X
37	M3 Threaded rear spacer	DSS 4XSF5AA50 X
50	M3 Threaded rear spacer	DSS 5XSF5AA50 X

DESCRIPTION


- Mounting style:
with M3 or 4-40 UNC threaded rear spacer
- For .040"/1.0 mm ± $\frac{.003}{.002}$ / $\frac{0.09}{0.06}$ mm finished through-hole diameter
Refer to product drawing for details
- Quality class 3 (also available in quality class 1)
- Shell: Steel tin plated (brass tin plated or stainless steel available on request)
- Order press-fit tool separately

PLUG CONNECTOR




No. of pos.	A -0.76	B +0.25	C	D -0.3
09	31.19	16.79	25.00 +0.12	6.12
15	39.52	25.12	33.30 +0.15 -0.10	6.12
25	53.42	38.84	47.04 +0.13	5.99
37	69.70	55.30	63.50 +0.13	5.99

9-37 pos.



50 pos.

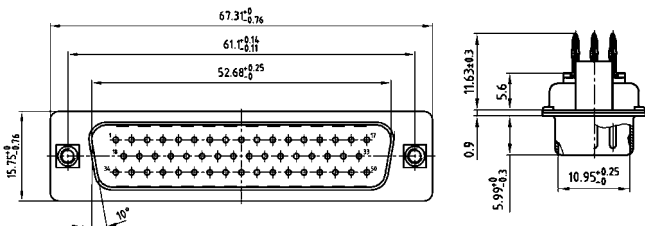

PLUG CONNECTOR		
No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer	DSS 1XPFAA49 X
15	4-40 UNC Threaded rear spacer	DSS 2XPFAA49 X
25	4-40 UNC Threaded rear spacer	DSS 3XPFAA49 X
37	4-40 UNC Threaded rear spacer	DSS 4XPFAA49 X
50	4-40 UNC Threaded rear spacer	DSS 5XPFAA49 X
09	M3 Threaded rear spacer	DSS 1XPFAA50 X
15	M3 Threaded rear spacer	DSS 2XPFAA50 X
25	M3 Threaded rear spacer	DSS 3XPFAA50 X
37	M3 Threaded rear spacer	DSS 4XPFAA50 X
50	M3 Threaded rear spacer	DSS 5XPFAA50 X