
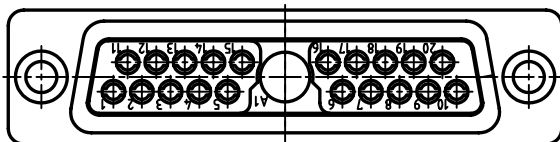

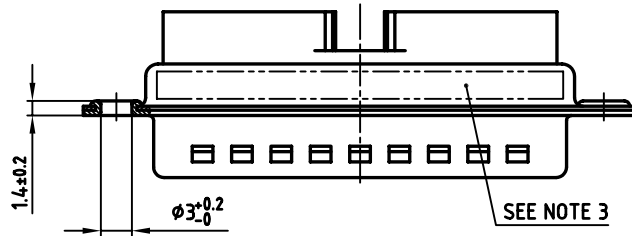


used for: D-SUB COMBINATION CRIMP

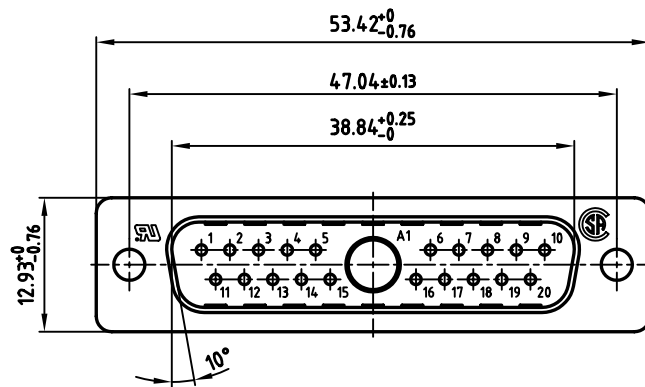

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN

2. INSULATORS: PBT GF UL 94 V-0, BLACK

3. CONNECTOR IS PART MARKED: 3021W1P XK99A10X CONEC ABC

4. = CHECK DIMENSION

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		
2004	date	name
drawn	01.12.	Lehmenkühler
appd.	01.12.	Mickenbecker
norm		
d-old		

scale: 2:1	
material: SEE NOTES	
title: D-SUB COMBINATION MALE 21W1P CRIMP-STYLE	
dwg no: 13K1A1272	AutoCAD 2004 DIN-A 3 sh: 1/1
part no: 3021W1P XK99A10X	