


GSD

KV-59-23

REVISIONS			
ISSUE	CHANGES		
6	CN 35975 C REDRAWN ME 01/13/95		
QGS0061			
SCALE	4:1		
APPROX SURFACE AREA			
USED ON			
REF.			
PLUG, MHV			
DRAWN	ME	DATE	01/13/95
DESIGN	LI	DATE	01/23/95
APPR.		DATE	
 KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707			
KV-59-23			

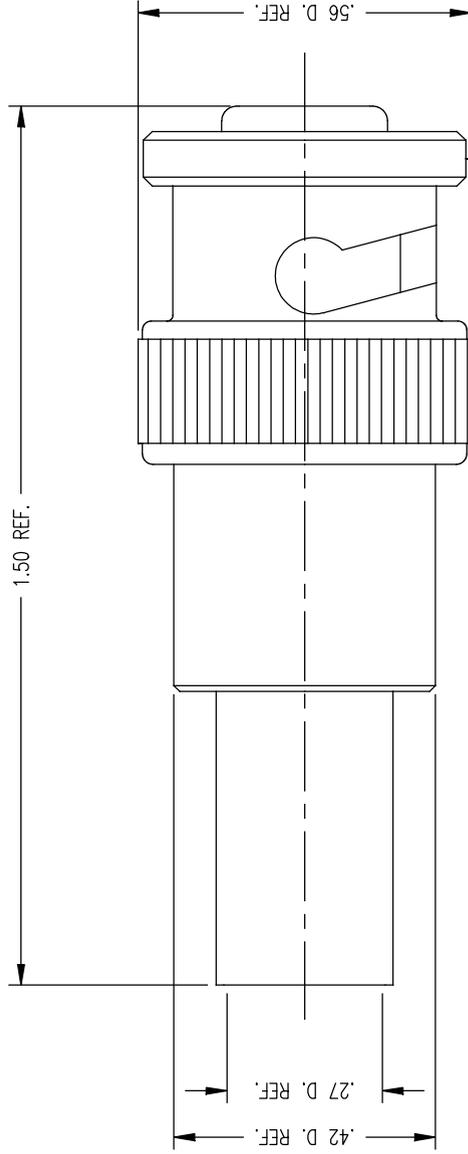

NOTES:

1. FOR USE WITH RG-59, 62, & 210/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-417.
3. FOR CABLE TRIMMING USE KTJ-70 & KTD-36.
4. FOR CRIMPING USE DIE KTH-2002.
5. INTERFACE PER MIL-STD-348, FIG. 303-1.
6. K-GRIP SLEEVE AND CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
7. MATERIALS:
 INSULATOR: TEFLON, ASTM-D-1457
 GASKET: SIL. RUB, ZZ-R-765
 SPRING WASHER: BER. COP., ASTM-B-196
 ALL OTHER PARTS: BRASS, QQ-B-626
8. FINISHES:
 CENTER CONTACT: SILVER PLT. PER QQ-S-365
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
 VOLTAGE RATING: 3500 VRMS
 INSULATION RESISTANCE: 5000 MEGOHMS

GSD