
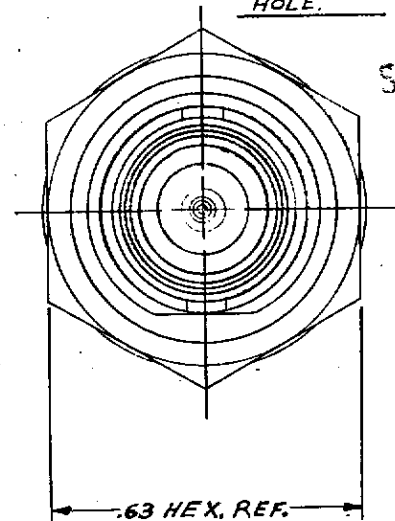



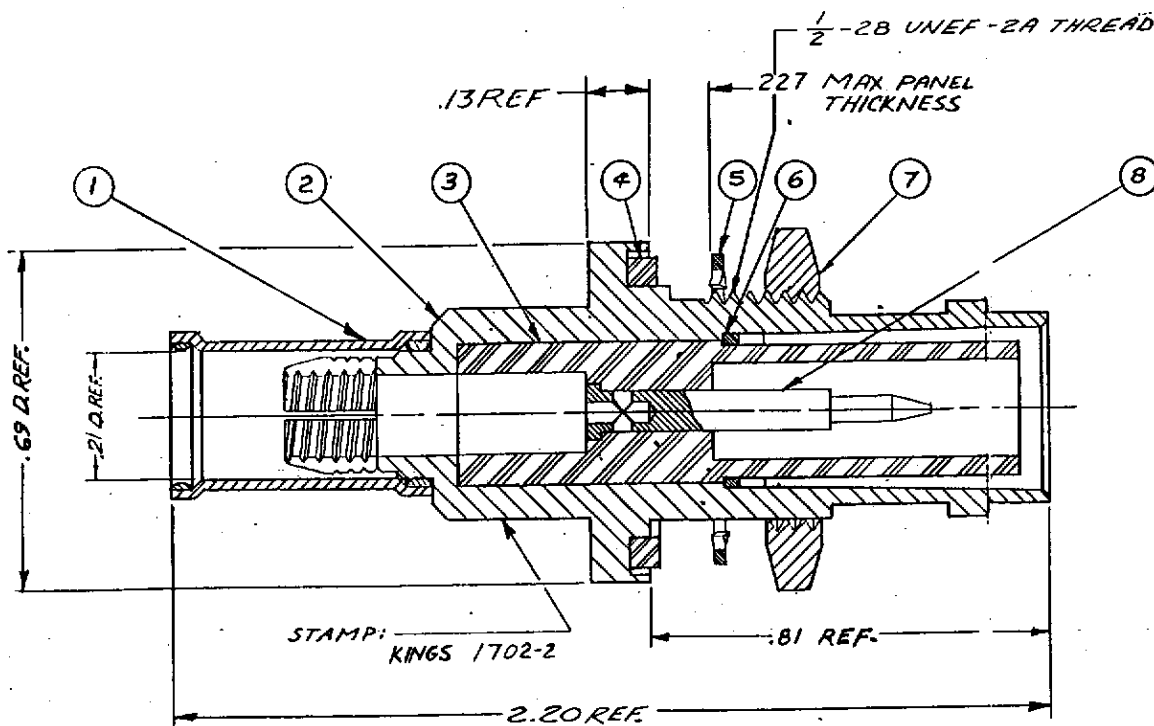

NOTES:

1. FOR USE WITH RG-58 & 141/14 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-441.
3. FOR CABLE TRIMMING USE KTJ-72 AND KTD-136
4. FOR CRIMPING USE DIE SIZE G1.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$
ANGLES $\pm 0' 30''$
T.I.R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

8	1	SHV CRIMP CONTACT M	
7	1	HEX. NUT	492A-9-M06
6	1	RETAINING RING	
5	1	LOCKWASHER	492A-12-M06
4	1	GASKET	492A-10-M99
3	1	INSULATOR	
2	1	K-GRIP BODY	
1	1	W/PK-GRIP SLEEVE	C-19-126-8-M27
ITEM	REQ'D	DESCRIPTION	DRAWING NO.

REVISIONS

ISSUE	CHANGES
0	ER 8189 CRS 28 APR 70
1	FORMAT CN 10987C J.G.L. 7 APR 72
2	CN 11246A CC 20 JUN 72
3	CN 12912A JL 7 NOV 73
4	CN 24955C M.A. 17 AUG 83
F	REVISED PER ER21326 01/22/2010 GGR

CUSTOMER
SALES DRAWING

REF: NBS. ND-545C

FINISH
SPEC. KER-10004

MATL.

SPEC.

SHV BULKHEAD
JACK

DRAWN JCA DATE 3 NOV 89

APPR. MJB DATE 7 NOV 89

KINGS
by WINCHESTER

Winchester Electronics
62 Barnes Industrial
Road North
Wallingford, CT 06492

1702-2