


LTR	DESCRIPTION	DATE	BY
-	Released	9/11/02	JCL

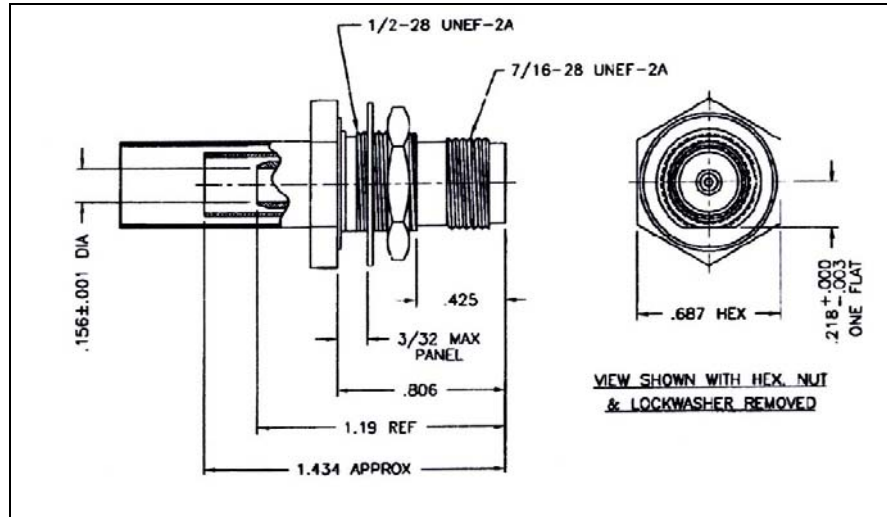

#### I. MATERIALS & FINISHES

center contact: Gold Plated Beryllium Copper  
 outer contact: Silver Plated Brass  
 body: Silver Plated Brass  
 crimp sleeve: Silver Plated Copper  
 dielectric: Teflon® PTFE  
 gasket: Silicone Rubber  
 shrink sleeve: Adhesive Lined Polyolefin  
 attachment: braid crimp (.255"hex)

#### II. ELECTRICAL PROPERTIES

impedance: 50 ohms  
 working voltage: 500 vrms (max)  
 vswr: 1.25:1 (max) up to 2.5 GHz  
 insertion loss:  $0.10 \times \sqrt{f_{ghz}}$

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

#### Approvals

Drawn	JCL	9/11/02



#### TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492  
 (203) 949-8400; (203) 949-8423.Fax  
 www.timesmicrowave.com

#### TC-240-TF-BH

Type-TNC female Bulkhead  
 for M17/221-00001 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-1156
--------	-----------------	------------------------

Scale: NA

Rev. (-)

Sheet: 1 of 1