


LTR	DESCRIPTION	DATE	BY
-	Released	1/20/95	JCL

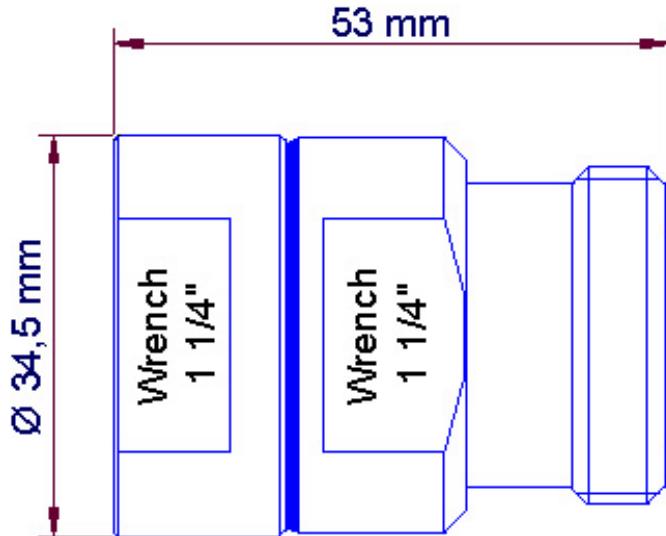

I. MATERIALS & FINISHES

center contact: Silver Plated Brass
 outer contact: Silver Plated Brass
 body: Silver Plated Brass
 backnut: Nickel Plated Copper
 dielectric: Teflon® PTFE
 gaskets: Nitrile Rubber
 attachment: braid clamp

II. ELECTRICAL PROPERTIES

impedance: 50 ohms
 working voltage: 1000 vrms (max)
 vswr: 1.15:1 (max) up to 3 GHz
 insertion loss: 0.10 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals

Drawn JCL 1/20/95



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
www.timesmicrowave.com

EZ-900-716FC

Type-716 DIN male (plug) – Non-Solder Pin
 for LMR-900 Cable

Size A CAGE CODE 68999 Drawing No.: 3190-334

Scale: NA

Rev. (-)

Sheet: 1 of 1