
©2005

Standard Cushion Inserts for Coaxial Cable Applications

1593 PR A (Pg. 1 of 2)

PRODUCT DESCRIPTION

Standard Cushion Inserts provide a weather tight seal around coaxial cable or elliptical waveguide when penetrating building walls or equipment bulkheads. SC-series cushions can be ordered individually, in boot assemblies, or with cushion hanger assembly kits to meet any application requirements. Standard cushion inserts are constructed from UV-resistant EPDM rubber which is durable in extreme temperatures and harsh environmental conditions.

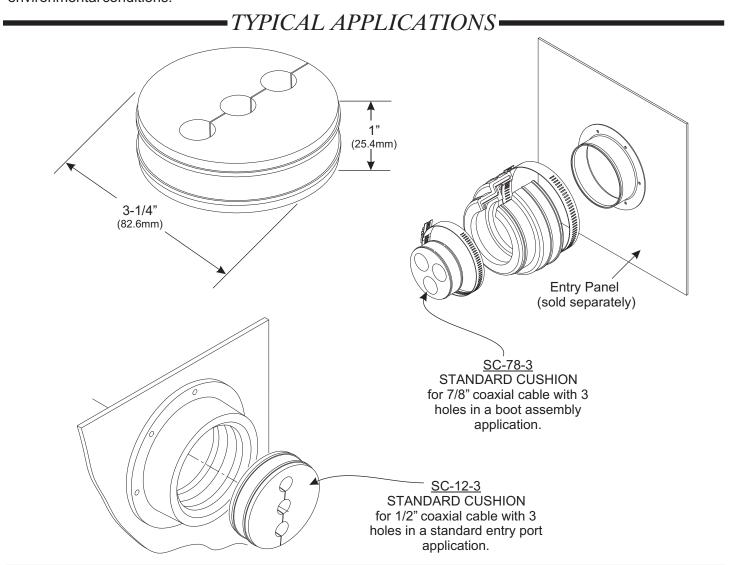



World Headquarters: 358 Hall Avenue, Wallingford, CT 06492 • 203-949-8400, 1-800-867-2629 FAX: 203-949-8423 International Sales: 4 School Brae, Dysart, Kirkcaldy, Fife, Scotland KY1 2XB UK • +44(0)1592655428 FAX: +44(0)1592653162 China Sales: Unit A, Floor 14, East Ocean Center, No. 618 Yan'an Road East, Shanghai, China 200001 TEL: 86-21-53854500/53854501 FAX: 86-21-53854506

STANDARD COAX CUSHIONS				
STANDARD PORT CUSHION FOR COAXIAL CABLE				
Part Number	Size	# of Holes	Weight lbs.	Kit Qty.
<u>r are reambor</u>	<u>0120</u>	<u># 01 110100</u>	<u>(kg)</u>	rate Gay.
SC-B		0	0.4 (0.2)	Each
STANDARD PORT CUSHION FOR LMR COAX				
Port Number	Sizo	# of Holes	Weight lbs.	Kit Qty.
<u>Part Number</u>	<u>Size</u>		<u>(kg)</u>	
SC-400T-6	LMR-400	6	0.3 (0.1)	Each
SC-600T-1	LMR-600	1	0.4 (0.2)	Each
SC-600T-2	LMR-600	2	0.4 (0.2)	Each
SC-600T-3	LMR-600	3	0.4 (0.2)	Each
SC-600T-4	LMR-600	4	0.4 (0.2)	Each
SC-900T-1	LMR-900	1	0.4 (0.2)	Each
SC-900T-2	LMR-900	2	0.4 (0.2)	Each
SC-900T-3	LMR-900	3	0.4 (0.2)	Each
SC-900T-4	LMR-900	4	0.4 (0.2)	Each
SC-1200T-1	LMR-1200	1	0.3 (0.1)	Each
SC-1200T-2	LMR-1200	2	0.3 (0.1)	Each
SC-1200T-3	LMR-1200	3	0.3 (0.1)	Each
SC-1700T-1	LMR-1700	1	0.3 (0.1)	Each

