


LTR	DESCRIPTION	DATE	BY
-	Released	9/13/02	JCL

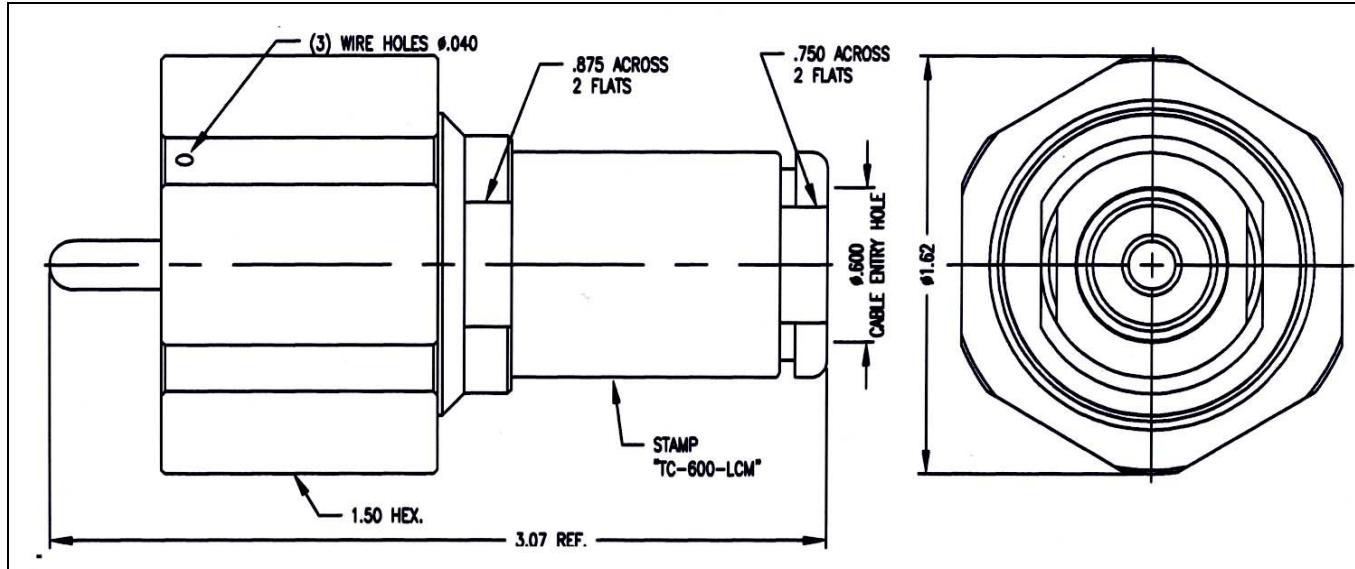

I. MATERIALS & FINISHES

center contact: Gold Plated Brass
 outer contact: Nickel Plated Phosphor Bronze
 body: Nickel Plated Brass
 dielectric: Teflon® PTFE
 gasket: Silicone Rubber
 shrink sleeve: Adhesive Lined Polyolefin
 attachment: braid clamp

II. ELECTRICAL PROPERTIES

impedance: 50 ohms
 working voltage: 5000 vrms (max)
 vswr: 1.25:1 (max) up to 1 GHz
 insertion loss: $0.10 \times \sqrt{Fghz}$

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals

Drawn JCL 9/13/02



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
www.timesmicrowave.com

TC-600-LCM

Type-LC male plug
 for LMR-600 Cable

Size A CAGE CODE 68999 Drawing No.: 3190-1406

Scale: NA

Rev. (-)

Sheet: 1 of 1